

# AMSOIL®

\$1.00 U.S.

*The First in Synthetics®*

## Factory Direct Catalog

Synthetic Motor Oils  
Synthetic Drivetrain Lubes  
Oil & Air Filters  
Appearance Products  
Fuel Additives

**NEW!**



TO ORDER - Call 1-800-956-5695 7 a.m. to 5 p.m. Central Time, M - F

# *The First in Synthetics*®



During Lieutenant Colonel Al Amatuzio's 25 years as an award-winning jet fighter pilot, he gained a solid appreciation for the extraordinary lubricants that protected the engines of the jets he flew. He knew that *only* these lubricants, synthetic lubricants, could stand up to the demanding operating conditions of jet engines and the severe temperature extremes they encounter.

He knew also that the same outstanding performance benefits synthetic lubricants provide for jet engines would prove invaluable to car, truck and other internal combustion engines.

Amatuzio began an intense period of research in 1963. He assembled the industry's most knowledgeable chemists, and by 1966 his newly formulated synthetic motor oil was being sold commercially. Throughout the 1960s Amatuzio continued his research and developed commercially available synthetic oils under a variety of names. In 1972, AMSOIL

became the first synthetic motor oil in the world to meet American Petroleum Institute service requirements.

The introduction of AMSOIL synthetic motor oil in 1972 set all-new standards for motor oil quality. AMSOIL synthetic motor oil outperformed conventional petroleum motor oils on all counts. It was clear from the start that this innovative product would play a major role in engine performance and engine life.

Today, virtually every other motor oil manufacturer has recognized the superiority of synthetic lubricants and has followed the AMSOIL lead with introductions of synthetic motor oils of their own. They spend millions of dollars advertising their "new" and "revolutionary" products. No one, however, can match AMSOIL experience and technological know-how. And no one delivers products like AMSOIL. Accept no substitutes — AMSOIL is "The First in Synthetics."®



# ***Know the Facts -*** **AMSOIL Saves You Money!**

*AMSOIL extended drain intervals mean fewer oil changes, long term savings and convenience*

## **EXAMPLE:**

### **Conventional motor oil companies recommend 3,000-mile drain intervals**

Conventional 5W-30 Motor Oil

\*(40 quarts needed for  
25,000 miles)

@ 2.50/qt. x 40 = \$100.00

8 Standard Oil Filters

@ 6.00 per filter x 8 = \$48.00

---

**TOTAL** **\$148.00**

### **AMSOIL recommends 25,000-mile/1-year drain intervals**

AMSOIL 5W-30 Synthetic Motor Oil

\*(5 quarts needed for  
25,000 miles)

@ 7.25/qt. x 5 = \$36.25

1 AMSOIL Ea Oil Filter

\$15.30

---

**TOTAL** **\$51.55**

\*Comparison based on 25,000 miles driven per year and 5-quart oil capacity.

You save **\$96.45 per year** using AMSOIL premium quality synthetic motor oil and oil filters.

Even if you drive only 12,000 miles per year, the cost for AMSOIL motor oil is less than you pay for petroleum oil now! And you still get better wear protection, lower engine temperatures, improved fuel efficiency and easier cold-weather starts. All of these benefits add up to reduced operating costs and longer engine life. Change your oil and filter today and in 12 months change the oil and filter again. That's it! What could be more convenient and good for your vehicle, too?

See the AMSOIL Product Information and Drain Interval Chart (G-2281, \$0.35) for more information.

# Products the Pros Use

## AMSOIL Supercross/Motocross


Team AMSOIL supercross/motocross star **Kevin Windham** will be racing in pursuit of an AMA motocross title this summer. Look for Windham and his Team AMSOIL teammates all season on the SPEED Channel.



AMSOIL is the official and exclusive oil of the AMA Outdoor Nationals.

*"We have so many things to thank AMSOIL for that I don't even know where to start. Most important is the quality of the product. Our team has never had an oil- or lubricant-related failure since working with AMSOIL. I couldn't make this claim about the company we tried to work with prior to AMSOIL."*

*Team owner Rick Zielfelder*

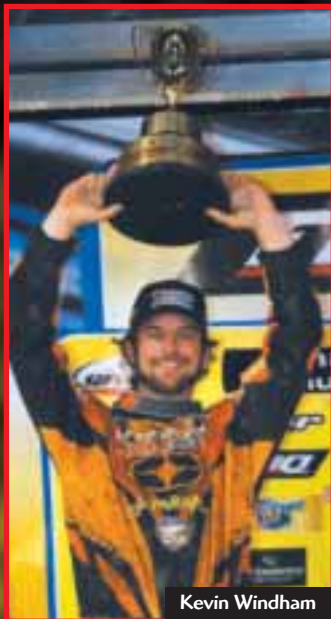

Kevin Windham

## AMSOIL Offroad Racing



Dan Vanden Heuvel

Team AMSOIL offroad racing stars **Dan Vanden Heuvel**, **Mike Oberg** and **Scott Douglas** are top contenders on the CORR and WSORR racing circuits this summer. Look for Vanden Heuvel, Oberg and

Douglas all season on NBC and the SPEED Channel.



Mike Oberg



Scott Douglas



## AMSOIL Champ Boat Series

Team AMSOIL powerboat racing star **Terry Rinker** swept the Champ Boat Series schedule in 2006 to earn his second straight championship. The three-time champion is back in action this summer to defend his title. Look for Rinker all season on the action-packed Champ Boat Series racing circuit on the SPEED Channel.



Official Oil

## AMSOIL Snocross

Team AMSOIL snocross stars **D.J. Eckstrom** and **Shaun Crapo** will be top contenders for a WPSA snocross championship next winter. Look for Eckstrom and Crapo all season on the SPEED Channel.

*"AMSOIL products have taken away a huge deterrent in the harsh environment of racing. The AMSOIL products we use deliver the consistency and performance that this sport demands."*

Team AMSOIL owner  
Steve Scheuring



See [www.amsoil.com](http://www.amsoil.com) for the latest racing schedules.

TO ORDER – Call 1-800-956-5695 7 a.m. to 5 p.m. Central Time, M - F



## **Series 2000 Synthetic 20W-50 Racing Oil**

The number one choice for racers of all types of vehicles. Special synthetic base stocks and advanced additive package provide over twice the wear protection of other motor oils. Reduces friction for quicker engine response and increased horsepower.

### **SERIES 2000 SAE 20W-50 SYNTHETIC RACING OIL API Service SM/CF, SL, SJ, SH . . .**

| <b>Stock#</b> | <b>Pkg./Size</b> | <b>Wt.Lbs.</b> | <b>Cost</b> |
|---------------|------------------|----------------|-------------|
| TRO-QT        | (1) Quart        | 2.2            | 9.50        |
| TRO-01        | (12) Quarts      | 26.0           | 112.80      |
| TRO-1G        | (1) Gallon       | 8.1            | 35.75       |
| TRO-04        | (4) Gallons      | 32.4           | 141.40      |



## **SAE 60 Synthetic Super Heavy Weight Racing Oil**

High viscosity oil designed for high horsepower racing engines. Resists thinning effects of fuel dilution and provides unsurpassed wear protection, friction reduction and more power. Highly resistant to thermal degradation and oxidation. Also great for older model Harley-Davidson motorcycles.

### **SAE 60 SYNTHETIC SUPER HEAVY WEIGHT RACING OIL API SL/CF, JASO MA**

| <b>Stock#</b> | <b>Pkg./Size</b> | <b>Wt.Lbs.</b> | <b>Cost</b> |
|---------------|------------------|----------------|-------------|
| AHR-QT        | (1) Quart        | 2.0            | 9.50        |
| AHR-01        | (12) Quarts      | 25.0           | 112.80      |

## Series 2000 Synthetic 0W-30 Motor Oil


The top performing AMSOIL motor oil for passenger cars. Race-proven technology provides unsurpassed fuel efficiency and better wear protection than other conventional and synthetic motor oils. Recommended for use in all vehicles requiring the use of 5W-30 or 10W-30 motor oils.

**SERIES 2000 SAE 0W-30 SYNTHETIC MOTOR OIL**  
**API Service SM/CF, SL, SJ . . . • ILSAC GF-4, 3 . . .**

| Stock# | Pkg/Size    | Wt. Lbs. | Cost   |
|--------|-------------|----------|--------|
| TSO-QT | (1) Quart   | 2.2      | 9.95   |
| TSO-01 | (12) Quarts | 26.0     | 118.20 |
| TSO-1G | (1) Gallon  | 7.9      | 36.55  |
| TSO-04 | (4) Gallons | 31.7     | 144.60 |



### The Smaller the Wear Scar, The Better the Protection!

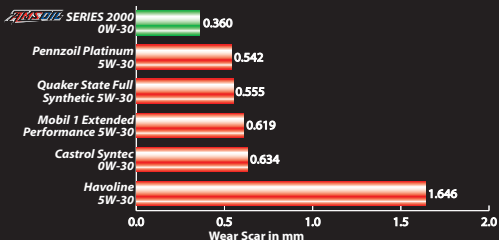

#### Four-Ball Wear Test (ASTM D-4172)

40 kg pressure @ 150° C, 1800 rpm, for 1 hour duration  
 As tested by an independent lab in November, 2005

## Series 3000 Synthetic 5W-30 Heavy Duty Diesel Oil

Fuel efficient formula for gasoline vehicles, off-road diesel vehicles and pre-2007 on-road diesel vehicles. Contains the beefiest additive package of all AMSOIL motor oils. Delivers better wear protection than other popular diesel oils and effectively reduces fuel consumption. Series 3000 is ideal for EGR engines. It resists soot thickening and breakdown from heat, blow-by and acids. For 2007 and newer on-road diesel vehicles, see Synthetic 5W-40 Premium Diesel Oil on pg. 11.



### SERIES 3000 SAE 5W-30 SYNTHETIC HEAVY DUTY DIESEL OIL

**API CI-4+/CF/CF-2/SL • Global DHD-1 • ACEA A3/B3, E3, E5 • JASO DH-1 • Mack • Detroit Diesel • Caterpillar • Cummins • Volvo • Daimler-Benz**

| Stock# | Pkg/Size        | Wt. Lbs. | Cost   |
|--------|-----------------|----------|--------|
| HDD-QT | (1) Quart       | 2.2      | 9.95   |
| HDD-01 | (12) Quarts     | 26.0     | 118.20 |
| HDD-1G | (1) Gallon      | 8.5      | 36.05  |
| HDD-04 | (4) Gallons     | 34.0     | 142.60 |
| HDD-TP | (1) 2.5 Gallon  | 19.6     | 84.40  |
| HDD-05 | (2) 2.5 Gallons | 39.2     | 166.80 |

# AMSOIL Top Sellers

**NEW!**



## Synthetic Motor Oil

Dramatically outperforms conventional petroleum motor oils. Reduces friction, heat and wear for maximum power, performance and fuel efficiency. Resists high-temperature burn-off, chemical breakdown and sludging—keeps engines cleaner. Outstanding low-temperature fluidity for fast, dependable winter starts and immediate start-up protection. Exceeds the most demanding world-wide performance standards and meets warranty requirements for all domestic and imported passenger car engines, both turbocharged and nonturbocharged. Up to 25,000-mile or 1-year drain intervals.

See the AMSOIL Product Information and Drain Interval Chart (G-2281, \$0.35) for more information.

### SAE 0W-20 SYNTHETIC MOTOR OIL

Recommended for applications requiring 5W-20 and 0W-20.

API Service SM/CF, SL, SJ...

• ILSAC GF-4, 3...

| Stock# | Pkg./Size   | Wt. Lbs. | Cost   |
|--------|-------------|----------|--------|
| ASM-QT | (1) Quart   | 2.1      | 7.55   |
| ASM-01 | (12) Quarts | 24.5     | 89.40  |
| ASM-1G | (1) Gallon  | 7.9      | 29.15  |
| ASM-04 | (4) Gallons | 32.0     | 115.00 |

### SAE 5W-30 SYNTHETIC MOTOR OIL

API Service SM/CF, SL, SJ...

• ILSAC GF-4, 3...

| Stock# | Pkg./Size   | Wt. Lbs. | Cost   |
|--------|-------------|----------|--------|
| ASL-QT | (1) Quart   | 2.1      | 7.25   |
| ASL-01 | (12) Quarts | 25.0     | 85.80  |
| ASL-1G | (1) Gallon  | 8.0      | 28.10  |
| ASL-04 | (4) Gallons | 32.0     | 110.80 |

### SAE 10W-30 SYNTHETIC MOTOR OIL

API Service SM/CF, SL, SJ...


• ILSAC GF-4, 3...

| Stock# | Pkg./Size       | Wt. Lbs. | Cost   |
|--------|-----------------|----------|--------|
| ATM-QT | (1) Quart       | 2.1      | 7.25   |
| ATM-01 | (12) Quarts     | 25.0     | 85.80  |
| ATM-1G | (1) Gallon      | 8.0      | 28.10  |
| ATM-04 | (4) Gallons     | 32.0     | 110.80 |
| ATM-TP | (1) 2.5 Gallon  | 19.5     | 67.65  |
| ATM-05 | (2) 2.5 Gallons | 39.0     | 133.30 |

### Noack Volatility SAE 10W-30

ASTM D-5800

June 2005 Test Results

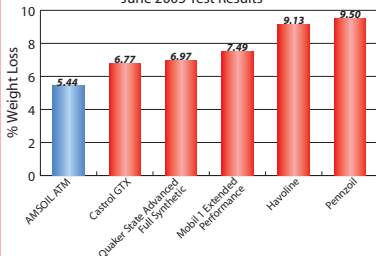

AMSOIL Synthetic Motor Oil doesn't volatilize (burn off) like other motor oils. The low volatility of AMSOIL Motor Oil reduces oil consumption and improves fuel efficiency.

NOTE: Most quick lube service centers will install the AMSOIL products you supply upon request or install them yourself.

## Synthetic Premium Protection Motor Oil

Ideal for cars, hot rods, motorhomes, motorcycles, gasoline engines, diesel engines and other applications that require or benefit from higher viscosity oil. Features robust antiwear and detergent/dispersant additives. Outperforms leading conventional and synthetic oils.

### SAE 10W-40 SYNTHETIC PREMIUM PROTECTION MOTOR OIL

API Service SL/CF, SJ, SH . . . , CI-4+

- JASO MA (motorcycle wet clutch)

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| AMO-QT | (1) Quart       | 2.1     | 7.30   |
| AMO-01 | (12) Quarts     | 25.0    | 86.40  |
| AMO-1G | (1) Gallon      | 8.0     | 28.35  |
| AMO-04 | (4) Gallons     | 32.0    | 111.80 |
| AMO-TP | (1) 2.5 Gallon  | 19.5    | 69.15  |
| AMO-05 | (2) 2.5 Gallons | 39.0    | 136.30 |

### SAE 20W-50 SYNTHETIC PREMIUM PROTECTION MOTOR OIL

API Service SL/CF, SJ, SH . . . , CI-4+

- JASO MA (motorcycle wet clutch)

| Stock# | Pkg./Size   | Wt.Lbs. | Cost   |
|--------|-------------|---------|--------|
| ARO-QT | (1) Quart   | 2.2     | 8.05   |
| ARO-01 | (12) Quarts | 26.0    | 95.40  |
| ARO-1G | (1) Gallon  | 8.0     | 30.95  |
| ARO-04 | (4) Gallons | 33.0    | 122.20 |

## Synthetic 5W-40 European Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks. Blended with advanced AMSOIL synthetic base stocks, premium additives and a broad 5W-40 viscosity rating, allowing motorists to take advantage of the maximum extended drain intervals recommended by European automakers while providing second-to-none protection and performance.

AMSOIL Synthetic 5W-40 European Motor Oil is recommended for applications requiring the following performance specifications:

- API SM/CF • ACEA C3-04 • ACEA A3/B3-04
- ACEA A3/B4-04 • MB 229.31, 229.51 • BMW LL-04
- Daimler Chrysler MS-10725 • Porsche • Saab
- Volvo • VW 502.00, 505.00, 505.01

### SYNTHETIC 5W-40 EUROPEAN MOTOR OIL

| Stock # | Pkg./Size   | Wt. Lbs. | Cost  |
|---------|-------------|----------|-------|
| AFL-QT  | (1) Quart   | 2.1      | 7.60  |
| AFL-01  | (12) Quarts | 24.8     | 90.00 |



**Recommended for  
VW 505.01,  
Mercedes-Benz 229.51  
and BMW LL-04**





## Synthetic 15W-40 Heavy Duty Diesel Oils

Engineered for all types of off-road diesel engines and pre-2007 EGR and non-EGR equipped on-road diesel engines. High 12 TBN controls acids from combustion blow-by and EGR. High levels of detergency and dispersancy additives control soot thickening, oxidation and wear. Protects against bore polishing, deposit formation and ring sticking. Provides clean engine performance. Extended drain capabilities reduce downtime and motor oil expenses. Heavy Duty Diesel and Marine Motor Oil provides up to 25,000-mile or one-year drain intervals in diesel pickups. See the AMSOIL Product Information and Drain Interval Chart (G-2281, \$0.35) for more information. For 2007 and newer on-road diesel vehicles, see Synthetic 5W-40 Premium Diesel Oil on pg. 11.

### SAE 15W-40 SYNTHETIC HEAVY DUTY DIESEL AND MARINE MOTOR OIL

**API CI-4+/CF/CF-2/SL • Global DHD-1 • ACEA A3/B3, E3, E5  
JASO DH-1 • Mack • Detroit Diesel • Caterpillar  
Cummins • Volvo • Daimler-Benz**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| AME-QT | (1) Quart       | 2.1     | 6.80   |
| AME-01 | (12) Quarts     | 25.0    | 80.40  |
| AME-1G | (1) Gallon      | 8.0     | 25.70  |
| AME-04 | (4) Gallons     | 33.0    | 101.20 |
| AME-TP | (1) 2.5 Gallon  | 20.0    | 61.25  |
| AME-05 | (2) 2.5 Gallons | 40.0    | 120.50 |

### SAE 15W-40 SYNTHETIC BLEND GASOLINE & DIESEL OIL

**API CI-4+/CF/CF-2/SL • Global DHD-1 • ACEA A3/B3, E3, E5  
JASO DH-1 • Mack • Detroit Diesel • Caterpillar  
Cummins • Volvo • Daimler-Benz**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| PCO-QT | (1) Quart       | 2.1     | 5.85   |
| PCO-01 | (12) Quarts     | 25.0    | 69.00  |
| PCO-1G | (1) Gallon      | 8.0     | 21.25  |
| PCO-04 | (4) Gallons     | 33.0    | 83.40  |
| PCO-TP | (1) 2.5 Gallon  | 19.6    | 51.15  |
| PCO-05 | (2) 2.5 Gallons | 39.1    | 100.30 |

## Oil Analysis

AMSOIL and its subsidiary OAI Inc. provide state-of-the-art oil analysis service to its customers. Customers receive detailed analysis reports via mail and e-mail. Expert consultation of oil condition is easily accessible by phone.

| Stock#  | Pkg./Size                                    | Wt. Lbs. | Cost  |
|---------|--|----------|-------|
| G-1451  | (1) sample kit<br>(includes two-way postage) | 0.1      | 25.20 |
| G-1451U | (1) sample kit<br>(includes UPS shipping)    | 0.1      | 25.20 |
| G-1318  | (1) sample kit                               | 0.1      | 20.20 |
| G-1206  | Oil Suction Pump w/10-ft. hose               | --       | 27.25 |
| G-1571  | Replacement Hose 25-ft.                      | --       | 8.85  |

## **Synthetic 10W-30/SAE 30 Heavy Duty Diesel Oil**

Exceeds both 10W-30 multi-grade and SAE 30 straight-grade viscosity requirements. Provides outstanding performance in off-road diesel engines, gasoline engines and pre-2007 on-road diesel engines. Extends drain intervals. See the AMSOIL Product Information and Drain Interval Chart (G-2281, \$0.35) for more information. For 2007 and newer on-road diesel vehicles, see Synthetic 5W-40 Premium Diesel Oil below.



**SYNTHETIC 10W-30/SAE 30 HEAVY DUTY DIESEL OIL**  
**API CI-4+/CF/CF-2/SL • Global DHD-1 • ACEA A3/B3, E3, E5 • JASO DH-1 • Mack • Detroit Diesel • Caterpillar • Cummins • Volvo • Daimler-Benz**

| Stock# | Pkg./Size   | Wt.Lbs. | Cost   |
|--------|-------------|---------|--------|
| ACD-1G | (1) Gallon  | 8.0     | 26.15  |
| ACD-04 | (4) Gallons | 33.0    | 103.00 |

## **Synthetic 5W-40 Premium API CJ-4 Diesel Oil**

The premium choice diesel oil for model year 2007 and newer heavy-duty and pickup truck diesel engines requiring API CJ-4 emission quality oil standards. Withstands the stress of heat, soot and acids to help prevent deposits, corrosion and wear. Broad viscosity range offers superior protection over a wide temperature range. Recommended for the longest service interval established by the engine, vehicle or equipment manufacturer. Drain intervals may be extended based on oil analysis. Compatible with all exhaust treatment devices and designed to extend the service life of particulate filters. Replaces 5W-40, 10W-40 and 15W-40 viscosity oils and is "backwards compatible" with pre-2007 diesel engines.



**SAE 5W-40 SYNTHETIC PREMIUM DIESEL OIL**  
**API CJ-4, CI-4+, CH-4, CF • API SM, SL, SJ...**  
**• ACEA E7 • Mack EO-O Premium Plus • DDC Power Guard 93K218 • Caterpillar ECF-3, ECF-1 • Cummins CES 20081 • Volvo VDS-4 • MB 228.3 • MTU Type II**

| Stock# | Pkg./Size   | Wt.Lbs. | Cost   |
|--------|-------------|---------|--------|
| DEO-QT | (1) Quart   | 2.1     | 7.45   |
| DEO-01 | (12) Quarts | 24.6    | 88.20  |
| DEO-1G | (1) Gallon  | 8.0     | 27.55  |
| DEO-04 | (4) Gallons | 31.8    | 108.60 |



**Maximum  
Performance**



**Maximum  
Reliability**



## HP Injector Synthetic 2-Cycle Oil

Precise synthetic formulation exceeds the lubrication demands of modern two-cycle engines. Premium synthetic base oils and MAX-DOSE additive system provides superior performance in direct fuel injected (DFI), electronic fuel injected (EFI) and carbureted outboard motors, as well as other recreational two-cycle equipment.

### HP INJECTOR SYNTHETIC 2-CYCLE OIL TC-W3 / API TC

| Stock # | Pkg./Size   | Wt. Lbs. | Cost   |
|---------|-------------|----------|--------|
| HPI-QT  | (1) Quart   | 2.0      | 6.95   |
| HPI-01  | (12) Quarts | 24.5     | 82.20  |
| HPI-1G  | (1) Gallon  | 7.9      | 25.85  |
| HPI-04  | (4) Gallons | 31.7     | 101.80 |

## DOMINATOR Synthetic 2-Cycle Racing Oil

Robust formulation specially engineered for unsurpassed protection in high performance two-cycle motors, both on and off the track. Heavier synthetic base oils provide more *lubricity* for "on the edge" operation. Reduces friction and protects pistons and bearings subjected to the rigors of racing.

### DOMINATOR SYNTHETIC 2-CYCLE RACING OIL API TC / JASO FC

| Stock # | Pkg./Size   | Wt. Lbs. | Cost   |
|---------|-------------|----------|--------|
| TDR-QT  | (1) Quart   | 2.1      | 9.25   |
| TDR-01  | (12) Quarts | 25.1     | 109.80 |
| TDR-1G  | (1) Gallon  | 8.1      | 35.50  |
| TDR-04  | (4) Gallons | 32.4     | 140.40 |

## Interceptor Synthetic 2-Cycle Oil

Engineered specially for power sports applications and those engines equipped with exhaust power valves. Contains the finest synthetic base oils and additives available for exceptional cleanliness properties. Controls exhaust valve sticking and provides outstanding overall lubrication properties.

### INTERCEPTOR SYNTHETIC 2-CYCLE OIL API TC / JASO FC

| Stock # | Pkg./Size   | Wt. Lbs. | Cost   |
|---------|-------------|----------|--------|
| AIT-QT  | (1) Quart   | 2.1      | 8.40   |
| AIT-01  | (12) Quarts | 25.0     | 99.60  |
| AIT-1G  | (1) Gallon  | 8.0      | 31.65  |
| AIT-04  | (4) Gallons | 33.0     | 125.00 |

## Saber Synthetic 100:1 Pre-Mix 2-Cycle Oils

Specifically designed for lean mix ratios in pre-mix applications. Saber Professional contains high temperature detergents for small power equipment. Saber Outboard contains lower temperature dispersants for water-cooled outboard motors.

### SABER PROFESSIONAL SYNTHETIC 100:1 PRE-MIX 2-CYCLE OIL

#### ISO-L-EGD / API TC / JASO FD

| Stock # | Pkg./Size                 | Wt. Lbs. Cost |        |
|---------|---------------------------|---------------|--------|
| ATP-BC  | (1) 8-oz. Bottle          | 0.7           | 3.70   |
| ATP-08  | (12) 8-oz. Bottles        | 8.6           | 43.20  |
| ATP-PK  | (1) 1.5-oz. Pillow Pack   | 0.2           | 1.30   |
| ATP-48  | (48) 1.5-oz. Pillow Packs | 7.2           | 60.00  |
| ATP-QT  | (1) Quart                 | 2.1           | 9.15   |
| ATP-01  | (12) Quarts               | 25.4          | 108.60 |
| ATP-BA  | (1) 3.5-oz. Bottle        | 0.4           | 2.10   |
| ATP-35  | (12) 3.5-oz. Bottles      | 4.5           | 24.00  |

### SABER OUTBOARD SYNTHETIC 100:1 PRE-MIX 2-CYCLE OIL

#### TC-W3 / API TC

| Stock # | Pkg./Size          | Wt. Lbs. Cost |        |
|---------|--------------------|---------------|--------|
| ATO-BC  | (1) 8-oz. Bottle   | 0.7           | 3.80   |
| ATO-08  | (12) 8-oz. Bottles | 8.7           | 44.40  |
| ATO-QT  | (1) Quart          | 2.2           | 9.10   |
| ATO-01  | (12) Quarts        | 25.8          | 108.00 |



## AMSOIL 2-Cycle Oil Recommendations

| AMSOIL 2-Cycle Oil   | Outboard*                 | Snowmobile*,<br>Motorcycle* & ATV* | Personal Watercraft*<br>& Jet Boat* | Chain Saw,<br>Chop Saw & Pump | Weed Eater, Blower<br>& Lawn Mower | Moped, Scooter<br>& Go-Cart |
|--|---------------------------|------------------------------------|-------------------------------------|-------------------------------|------------------------------------|-----------------------------|
| <b>HP Injector (HPI)<br/>TC-W3, API TC</b><br>(Injection or 50:1 Pre-Mix)        | Excellent                 | Very Good                          | Very Good                           | Not Recommended               | Not Recommended                    | Not Recommended             |
| <b>INTERCEPTOR (AIT)<br/>API TC, JASO FC</b>                                     | Not Recommended           | Excellent                          | Excellent                           | Good                          | Good                               | Good                        |
| <b>DOMINATOR (TDR)<br/>API TC, JASO FC</b>                                       | Racing<br>(1)             | Racing<br>(2)                      | Racing<br>(2)                       | Very Good                     | Very Good                          | Very Good                   |
| <b>Saber Professional 100:1<br/>Pre-Mix (ATP) ISO-L-EGD,<br/>JASO FD, API TC</b> | Not Recommended           | Very Good<br>Pre-Mix Only          | Very Good<br>Pre-Mix Only           | Excellent                     | Excellent                          | Excellent                   |
| <b>Saber Outboard 100:1<br/>Pre-Mix (ATO) TC-W3, API TC</b>                      | Excellent<br>Pre-Mix Only | Very Good<br>Pre-Mix Only          | Very Good<br>Pre-Mix Only           | Not Recommended               | Not Recommended                    | Not Recommended             |

Equipment manufacturers and motor builders have redesigned two-cycle motors to reduce emissions and increase fuel economy. These changes have increased operating temperatures, reduced oil consumption and incorporated direct fuel injection and exhaust power valves. AMSOIL 2-Cycle Oils are designed to maximize performance in all types of engine designs and are optimized for select applications.

Even though AMSOIL 2-Cycle Oils have been optimized for specific applications, they are multi-functional and recommended for use in many areas. The chart rates each oil's performance abilities per application as follows:

**Excellent:** The primary recommendation for the oil. The oil is specifically designed for the operating conditions of the motors in these markets. There is only one "Excellent" recommendation per category.

**Very Good:** A main recommendation for the oil. Identifies an oil that is very good for the operating conditions of these motors.

**Good:** A secondary recommendation for the oil. The oil was not specifically designed for these applications. However, the chemistry in the oil is suited to the operating conditions of these motors.

**Not Recommended:** Identifies applications where the product was not intended for use.

**Racing:** (1) Not recommended for long-term use in outboard motors as a TC-W3 type oil, although excellent as a race oil for short term use where motors are periodically inspected.

(2) Excellent for racing or modified motors. Very good for recreational use.

\*Recommended for all direct fuel injected (DFI), electronic fuel injected (EFI) and carbureted motors. Outboard motors include Mercury® Optimax®, Johnson® & Evinrude® FICHT® & E-TEC®, Yamaha® HPDI, Nissan® & Tohatsu® TLDI®.

## Synthetic XL Motor Oil

AMSOIL XL Synthetic Motor Oils provide peace-of-mind. The oil drain interval recommendations for many of today's vehicles extend well beyond the traditional 3,000-mile interval, some up to 12,000 miles with electronic oil monitoring systems. Unlike petroleum oils that have 3,000-mile maximum recommendations, AMSOIL XL Oils provide 7,500-mile/six-month drain intervals or longer where stated by vehicle manufacturers or indicated by oil life monitoring systems. When using AMSOIL XL Synthetic Motor Oils, protection and performance are not sacrificed with longer drain intervals.

### SYNTHETIC XL MOTOR OIL

#### 5W-20 MOTOR OIL

*API SM/CF, SL, SJ . . . , ILSAC GF-4, 3 . . .*

| Stock# | Pkg./Size   | Wt.Lbs. | Cost  |
|--------|-------------|---------|-------|
| XLM-QT | (1) Quart   | 2.0     | 6.00  |
| XLM-01 | (12) Quarts | 24.0    | 70.80 |
| XLM-1G | (1) Gallon  | 7.8     | 23.70 |
| XLM-04 | (4) Gallons | 31.3    | 93.20 |

#### 5W-30 MOTOR OIL

*API SM/CF, SL, SJ . . . , ILSAC GF-4, 3 . . .*

| Stock# | Pkg./Size   | Wt.Lbs. | Cost  |
|--------|-------------|---------|-------|
| XLF-QT | (1) Quart   | 2.0     | 6.00  |
| XLF-01 | (12) Quarts | 24.0    | 70.80 |
| XLF-1G | (1) Gallon  | 7.8     | 23.70 |
| XLF-04 | (4) Gallons | 31.3    | 93.20 |

#### 10W-30 MOTOR OIL

*API SM/CF, SL, SJ . . . , ILSAC GF-4, 3 . . .*

| Stock# | Pkg./Size   | Wt.Lbs. | Cost  |
|--------|-------------|---------|-------|
| XLT-QT | (1) Quart   | 2.0     | 6.00  |
| XLT-01 | (12) Quarts | 24.0    | 70.80 |
| XLT-1G | (1) Gallon  | 7.8     | 23.70 |
| XLT-04 | (4) Gallons | 31.3    | 93.20 |

#### 10W-40 MOTOR OIL

*API SM/CF, SL, SJ . . .*

| Stock# | Pkg./Size   | Wt.Lbs. | Cost  |
|--------|-------------|---------|-------|
| XLO-QT | (1) Quart   | 2.0     | 6.00  |
| XLO-01 | (12) Quarts | 24.0    | 70.80 |

• AMSOIL synthetic motor oils are fully compatible with conventional motor oil. For best results, however, use AMSOIL Engine Flush, then install AMSOIL synthetic motor oil (See page 40).

• For maximum engine protection, use an AMSOIL Ea Oil Filter and an AMSOIL Ea Air Filter (See pages 30-31).

## Advanced Synthetic Motorcycle Oils

### SAE 20W-50 SYNTHETIC MOTORCYCLE OIL

API Service SG, SL/CF • JASO MA/MA2

Recommended for Harley-Davidson, Buell, KTM, Ducati, Aprilia, BMW, Triumph and other motorcycle engines. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability provides unsurpassed protection for high performance engines, transmissions and primary chaincases. No friction modifiers. Wet clutch compatible.

| Stock# | Pkg./Size   | Wt.Lbs. | Cost   |
|--------|-------------|---------|--------|
| MCV-QT | (1) Quart   | 2.1     | 9.25   |
| MCV-01 | (12) Quarts | 24.7    | 109.80 |
| MCV-1G | (1) Gallon  | 8.0     | 35.25  |
| MCV-04 | (4) Gallons | 31.9    | 139.40 |

### SAE 10W-40 SYNTHETIC MOTORCYCLE OIL

API Service SG, SL/CF • JASO MA/MA2

Recommended for Honda, Yamaha, Kawasaki, Victory, BMW and other motorcycle engines. Superior synthetic formulation provides long service life and maximum protection against engine wear. Superior shear stability provides unsurpassed protection for high performance engines and transmissions. No friction modifiers. Wet clutch compatible.

| Stock# | Pkg./Size   | Wt.Lbs. | Cost   |
|--------|-------------|---------|--------|
| MCF-QT | (1) Quart   | 2.1     | 8.95   |
| MCF-01 | (12) Quarts | 24.6    | 106.20 |
| MCF-1G | (1) Gallon  | 8.0     | 33.80  |
| MCF-04 | (4) Gallons | 31.8    | 133.60 |

## Formula 4-Stroke® Marine Synthetic Motor Oils

Formulated specifically for use in 4-stroke gasoline-fueled engines used in marine applications. Offer unsurpassed wear protection, viscosity stability, low volatility and excellent low temperature fluidity. Certified to meet NMMA FC-W performance specifications. Meet "Warranty Certified" status of engine manufacturers. Recommended for use in 4-stroke outboard motors including Honda, Yamaha, Mercury, Suzuki, Johnson-Evinrude (BRP), Nissan and Tohatsu. Excellent for use in marine inboard/outboard (I/O) engines including Mercury (MerCruiser), OMC and Volvo-Penta. Also for use with marine inboard power plants including Crusader, Marine Power, GM, Ford and Chrysler. Recommended for use with personal water craft (PWC) including Sea Doo (BRP), Honda, Yamaha and Kawasaki.

### 10W-30 FORMULA 4-STROKE® MARINE SYNTHETIC MOTOR OIL

API SL • NMMA FC-W (Registration #FB-30011B)

| Stock # | Pkg./Size   | Wt. Lbs. | Cost  |
|---------|-------------|----------|-------|
| WCT-QT  | (1) Quart   | 2.0      | 7.85  |
| WCT-01  | (12) Quarts | 24.5     | 93.00 |

### 10W-40 FORMULA 4-STROKE® MARINE SYNTHETIC MOTOR OIL

API SL • NMMA FC-W (Registration #FB-30010B)

| Stock # | Pkg./Size   | Wt. Lbs. | Cost  |
|---------|-------------|----------|-------|
| WCF-QT  | (1) Quart   | 2.0      | 8.30  |
| WCF-01  | (12) Quarts | 24.6     | 98.40 |



- Lawn Tractors
- Generators
- Pumps
- Welders
- Skid-Steers
- Compressors
- and more



## Formula 4-Stroke® Synthetic Small Engine Oil

Provides superior protection in the hot temperature, severe service operating conditions of both gasoline and diesel-fueled small engines. Formulated with a high viscosity index and premium synthetic base oils that exceed both 10W-30 multi-grade and SAE 30 straight-grade viscosity requirements. Provides excellent all season protection and performance. As a commercial grade lubricant, it meets the demands of homeowner, commercial and industrial applications, improving productivity and reducing maintenance costs through superior engine protection.

**FORMULA 4-STROKE® SYNTHETIC SMALL ENGINE OIL**  
**API SL, SJ, SH, SG • API CF, CD**  
**• JASO MA (motorcycle wet clutch)**

| Stock# | Pkg./Size   | Wt.Lbs. | Cost  |
|--------|-------------|---------|-------|
| ASE-QT | (1) Quart   | 2.0     | 6.05  |
| ASE-O1 | (12) Quarts | 24.1    | 71.40 |

## Synthetic 4-Stroke® Power Sports Oil

Specially formulated to provide serious protection and performance in recreational four-stroke motors, including ATV's and snowmobiles. Broad 0W-40 viscosity rating provides superior protection in both hot and cold temperature extremes.

**AMSOIL FORMULA 4-STROKE® POWER SPORTS  
 SYNTHETIC MOTOR OIL**  
**SAE 0W-40 • API Service SG, SH, SJ, SL/CF**  
**• JASO MA/MA2**

| Stock# | Pkg./Size   | Wt.Lbs. | Cost  |
|--------|-------------|---------|-------|
| AFF-QT | (1) Quart   | 2.0     | 8.05  |
| AFF-O1 | (12) Quarts | 24.0    | 95.40 |

## Formula 4-Stroke® Synthetic Scooter Oil

Formulated specifically to meet the special needs of today's high-tech air- and water-cooled four-stroke motorized scooters, offering unsurpassed wear protection and friction reduction for longer equipment life and cooler operating temperatures. Its 10W-40 viscosity ensures consistent viscosity protection and provides additional protection for transmissions and gear boxes, while its friction modifier-free formulation ensures wet clutch compatibility and smooth clutch operation. A special anti-corrosion additive package provides long-term protection during periods of inactivity and storage.

**FORMULA 4-STROKE® SYNTHETIC SCOOTER OIL**  
**API SG, SL/CF • JASO MA/MA2 (motorcycle wet clutch)**

| Stock# | Pkg./Size   | Wt. Lbs. | Cost  |
|--------|-------------|----------|-------|
| ASO-QT | (1) Quart   | 2.0      | 6.20  |
| ASO-O1 | (12) Quarts | 24.2     | 73.20 |

## Synthetic 80W-90 Gear Lube

High quality replacement for applications specifying SAE 80W-90 conventional gear lube. Synthetic construction provides improved cold flow properties, high viscosity index, heat resistance and excellent wear protection.

**SAE 80W-90 SYNTHETIC GEAR LUBE**  
**API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J**  
**• Dana SHAES 234 (Eaton PS-037)**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| AGL-QT | (1) Quart       | 2.1     | 8.15   |
| AGL-01 | (12) Quarts     | 25.2    | 96.60  |
| AGL-1G | (1) Gallon      | 8.1     | 30.80  |
| AGL-04 | (4) Gallons     | 32.4    | 121.60 |
| AGL-05 | (1) 5-gal. Pail | 39.8    | 148.20 |

## SEVERE GEAR® Synthetic EP Gear Lubes

Specifically engineered for high demand applications, including trailer towing, heavy hauling, 4x4 off road driving, commercial use and racing. Superior lube "film strength" combined with extra additives protects gears and bearings from scoring and wear. Resist high heat and possess excellent cold flow properties. *Outperforms all conventional gear oils.* Recommended for all types of vehicles such as turbo diesel pick-ups, SUVs, autos, trucks, heavy equipment and motor homes. Compatible with most limited-slip differentials.

**SAE 75W-90 SEVERE GEAR® SYNTHETIC GEAR LUBE**  
**API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J**  
**• Dana SHAES 234 (Eaton PS-037)**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| SVG-QT | (1) Quart       | 2.0     | 11.20  |
| SVG-01 | (12) Quarts     | 24.5    | 133.20 |
| SVG-05 | (1) 5-gal. Pail | 38.8    | 201.90 |

**SAE 75W-110 SEVERE GEAR® SYNTHETIC GEAR LUBE**  
**API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J**  
**• Dana SHAES 234 (Eaton PS-037)**

| Stock# | Pkg./Size       | Wt. Lbs. | Cost   |
|--------|-----------------|----------|--------|
| SVT-QT | (1) Quart       | 2.1      | 12.35  |
| SVT-01 | (12) Quarts     | 24.8     | 147.00 |
| SVT-05 | (1) 5-gal. Pail | 39.3     | 220.70 |

**SAE 75W-140 SEVERE GEAR® SYNTHETIC GEAR LUBE**  
**API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J**  
**• Dana SHAES 234 (Eaton PS-037)**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| SVO-QT | (1) Quart       | 2.1     | 13.75  |
| SVO-01 | (12) Quarts     | 24.7    | 163.80 |
| SVO-05 | (1) 5-gal. Pail | 39.2    | 249.20 |





## Long Life Synthetic Gear Lubes


Specifically engineered for extended drain intervals up to 500,000 miles as set by equipment manufacturers for over-the-road trucks. Protects against wear and improves equipment life. Excellent "All Season" summer and winter performance. *Outperforms all conventional gear oils.* Also excellent for passenger cars and trucks. Compatible with most limited-slip differentials.

**SAE 75W-90 LONG LIFE SYNTHETIC GEAR LUBE**  
**API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+**  
**• Dana SHAES 256 (Eaton PS-163)**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| FGR-QT | (1) Quart       | 2.1     | 9.20   |
| FGR-01 | (12) Quarts     | 25.0    | 109.20 |
| FGR-1G | (1) Gallon      | 8.1     | 35.55  |
| FGR-04 | (4) Gallons     | 32.3    | 140.60 |
| FGR-05 | (1) 5-gal. Pail | 39.7    | 169.50 |

**SAE 80W-140 LONG LIFE SYNTHETIC GEAR LUBE**  
**API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J+**  
**• Dana SHAES 256 (Eaton PS-163)**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost    |
|--------|-----------------|---------|---------|
| FGO-05 | (1) 5-gal. Pail | 40.0    | 168.20  |
| FGO-16 | 16-gal. Keg     | 135.0   | 491.00  |
| FGO-30 | 30-gal. Drum    | 249.0   | 825.00  |
| FGO-55 | 55-gal. Drum    | 446.0   | 1418.00 |

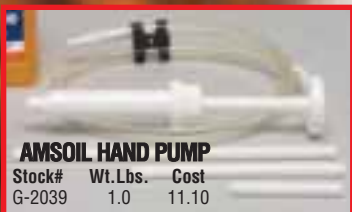

### AMSOIL HAND PUMP

| Stock# | Wt.Lbs. | Cost  |
|--------|---------|-------|
| G-2039 | 1.0     | 11.10 |

## Universal Synthetic Marine Gear Lube

Provides true marine gear performance, resists foaming and retains extreme pressure qualities even when subjected to 10 percent water contamination. For use in outboard lower units, sterndrives, V-drives, bow and tunnel thrusters and marine transmissions requiring a SAE 75W-90 or 80W-90 meeting either GL-4 or GL-5 performance standards.

**SAE 75W/80W-90 UNIVERSAL SYNTHETIC MARINE GEAR LUBE**  
**• GL-5, GL-4**

| Stock# | Pkg./Size         | Wt.Lbs. | Cost   |
|--------|-------------------|---------|--------|
| AGM-TB | (1) 13-oz. Tube   | .8      | 6.50   |
| AGM-06 | (6) 13-oz. Tubes  | 5.0     | 38.40  |
| AGM-QT | (1) Quart         | 2.1     | 8.15   |
| AGM-01 | (12) Quarts       | 24.8    | 96.60  |
| AGM-05 | (1) 5 Gallon Pail | 39.8    | 142.00 |



## Slip-Lock Differential Additive

Eliminates gear-housing chatter in cars, trucks and SUVs equipped with limited-slip, positraction and locking differentials. Reduces banging and clunking associated with automatic locking differentials. Formulated for use with both synthetic and petroleum gear lubricants and safely replaces manufacturer-recommended friction modifiers. One bottle treats differential capacities of two to four quarts.

**Note:** AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

| Stock # | Pkg./Size          | Wt. Lbs. | Cost  |
|---------|--------------------|----------|-------|
| ADA-BA  | (1) 4-oz. Bottle   | .3       | 7.20  |
| ADA-12  | (12) 4-oz. Bottles | 3.9      | 85.20 |

## Shock Therapy® Suspension Fluid

Formulated for maximum stability and performance in high-performance applications. Effectively controls friction and heat and significantly reduces wear and scuffing. Viscosity remains constant and foam and aeration are kept to a minimum, limiting shock fade and inconsistent dampening. Offers superior performance in temperature extremes.

### SHOCK THERAPY SUSPENSION FLUID

| Stock #                 | Pkg./Size       | Wt. Lbs. | Cost   |
|-------------------------|-----------------|----------|--------|
| STL-QT (lightweight #5) | 1 qt.           | 2        | 10.25  |
| STL-01 (lightweight #5) | 12 qts.         | 24       | 121.80 |
| STL-05 (lightweight #5) | (1) 5-gal. Pail | 37.7     | 173.50 |
| STM-QT (medium #10)     | 1 qt.           | 2        | 9.60   |
| STM-01 (medium #10)     | 12 qts.         | 24       | 114.00 |
| STM-05 (medium #10)     | (1) 5-gal. Pail | 38.1     | 166.00 |

AMSOIL STL #5 is recommended for applications that demand quick rebounds under extreme temperatures.

AMSOIL STM #10 is recommended for applications that require more dampening and slower rebounds.

## Super Shift Racing Transmission Fluid

Specially formulated for high horsepower and torque conditions. Provides quick, solid shifts. Automatic transmissions do not slip, helping racers improve on elapsed times. Delivers unmatched friction reduction and reduced wear so clutch plates and transmissions last longer. Provides maximum torque transfer and brake power while resisting oxidation and thermal breakdown.

### SUPER SHIFT RACING TRANSMISSION FLUID

SAE 10W • Allison C-4 • Ford Type F

| Stock# | Pkg./Size   | Wt.Lbs. | Cost   |
|--------|-------------|---------|--------|
| ART-QT | (1) Quart   | 2.0     | 9.10   |
| ART-01 | (12) Quarts | 24.0    | 108.00 |



**Use in  
Ford, Chrysler  
and G.M.  
Transmissions**



## **Synthetic Universal Automatic Transmission Fluid**

Exceeds the performance requirements for domestic and foreign automatic transmission fluids. Offers smooth shifting and long transmission life. Provides automatic transmissions, power steering units and hydraulic equipment with excellent lubricating protection and better performance over a wider temperature range. Resists oxidation and thermal breakdown. Provides low temperature protection. Formulated with excellent wear protection to last for extended drain intervals.

**AMSOIL ATF is recommended for applications requiring the following performance specifications:**  
**GM DEXRON® II, III & VI • Ford MERCON®, MERCON V, MERCON SP • Chrysler ATF+ thru ATF+4® • Honda Z1 (not CVT) • Toyota Type T & TIV • Mitsubishi/Hyundai Diamond SP II & III • Allison C-3, C-4 • Caterpillar TO-2 • Voith G607 & G1363 • ZF TE-ML 14A, B & C • MB 236.1, 236.2, 236.6, 236.7, 236.9 • BMW 7045E • JWS 3309 • LT 71141 (ESSO) • Nissan Matic D, J & K • Vickers I 286S & M2950S • NAG 1 & 2**

*Use in power steering units or hydraulics where ATF is specified. Not for use in CVT transmissions or Ford Type F applications.*

### **SYNTHETIC UNIVERSAL AUTOMATIC TRANSMISSION FLUID**

| Stock# | Pkg./Size       | Wt.Lbs. | Cost   |
|--------|-----------------|---------|--------|
| ATF-QT | (1) Quart       | 2.1     | 9.05   |
| ATF-01 | (12) Quarts     | 25.0    | 107.40 |
| ATF-TP | (1) 2.5 Gallon  | 19.0    | 85.00  |
| ATF-05 | (2) 2.5 Gallons | 38.0    | 168.00 |

## **Torque-Drive™ Synthetic Automatic Transmission Fluid**

Engineered to eliminate the deficiencies common to all conventional petroleum ATFs, AMSOIL Torque-Drive™ provides superior performance and protection against thermal and oxidative degradation, sludge and varnish formation and viscosity shear down. Ideal for Allison Transmissions and heavy equipment

**Recommended for use in applications specifying Allison® TES-295 or C-4, DEXRON® III, MERCON®, TE-ML 14C, Voith G-1363**

### **TORQUE-DRIVE™ SYNTHETIC AUTOMATIC TRANSMISSION FLUID**

| Stock # | Pkg./Size       | Wt. Lbs. | Cost   |
|---------|-----------------|----------|--------|
| ATD-1G  | (1) Gallon      | 7.8      | 38.20  |
| ATD-04  | (4) Gallons     | 31.2     | 151.20 |
| ATD-TP  | (1) 2.5 Gallon  | 19.1     | 93.05  |
| ATD-05  | (2) 2.5 Gallons | 38.2     | 184.10 |



## **Synthetic Manual Transmission and Transaxle Gear Lube**

Designed to meet the special requirements of certain manual transmissions and transaxles. Provides improved internal component protection. Formulated with extreme pressure additives and advanced synchronesh qualities that provide smooth shifts while protecting gears, bearings and seals. Non-corrosive to yellow metals. Recommended for manual transmissions and transaxles that require 75W-85, 75W-90 or 80W-90 viscosities and any of the following performance specifications: API GL-4 and MT-1, ZF TE-ML 02B, 16A, 17A and 19A, Chrysler MS-9070, MAN 341 ML. Recommended for use in NV 4500 transmissions and replaces GM part #12346190 and Chrysler part #4874459. Meets GL-4 specifications required by some models of Acura, Hyundai, Infiniti, Kia, Land Rover, Lexus, Mazda, Mitsubishi-Fuso and Zetor. Ideal for muscle car transmissions including Muncie, Borg-Warner, Saginaw, Ford Toploader, Dearborn and New Process. Also recommended for Gear Vendors Gear Splitters.



### **SYNTHETIC MANUAL TRANSMISSION & TRANSAXLE GEAR LUBE**

#### **75W-90 • API GL-4**

| <b>Stock #</b> | <b>Pkg./Size</b> | <b>Wt. Lbs.</b> | <b>Cost</b> |
|----------------|------------------|-----------------|-------------|
| MTG-QT         | (1) Quart        | 2.0             | 9.90        |
| MTG-01         | (12) Quarts      | 24.6            | 117.60      |
| MTG-05         | 5-gal. Pail      | 38.9            | 184.80      |

## **Synthetic Tractor/Hydraulic Transmission Oil**

Formulated for combinations of transmissions, hydraulic systems, final drives, power take-off systems and wet brakes, including hydrostatic lawn mower transmissions. Exceeds the most demanding "all weather" specifications of both Ford New Holland FNHA-2-C-200 & 2-C-201 and John Deere J20C & J20D, as well as most other tractor hydraulic/transmissions, eliminating the need for seasonal oil changes.



### **SYNTHETIC TRACTOR/HYDRAULIC TRANSMISSION OIL**

#### **SAE 5W-30**

| <b>Stock#</b> | <b>Pkg./Size</b> | <b>Wt. Lbs.</b> | <b>Cost</b> |
|---------------|------------------|-----------------|-------------|
| ATH-QT        | (1) Quart        | 2.1             | 7.05        |
| ATH-01        | (12) Quarts      | 25.2            | 83.40       |
| ATH-05        | (1) 5-gal. Pail  | 39.0            | 119.50      |
| ATH-30        | 30-gal. Drum     | 240.0           | 579.00      |
| ATH-55        | 55-gal. Drum     | 434.0           | 978.00      |



## **Synthetic Synchronmesh Transmission Fluid**

Specifically designed for manual transmissions and transaxles with synchronmesh systems that require light viscosity, non-extreme pressure fortified oil. Formulated with advanced additive technology to provide proper friction characteristics for smooth shifting without grinding or bump shifting while providing the ultimate in gear and bearing protection. Outperforms motor oils in manual transmissions and provides excellent performance in extreme temperatures from -40° F to 300° F. Possesses outstanding anti-wear and anti-foam properties and is non-corrosive to yellow metals. Recommended for use in manual transmissions and transaxles such as: New Venture NV T350, 1500, 2550, 3500, 3550, 5600, Tremec T-4, T-5, T-18, T-176, TKO-500, TKO-600, TR3450, TR3550. Replaces GM part # 12345349, 12345577, 12377916 and 1052931, Chrysler part # 4874464 and 4874465. Meets GM specifications 9985648, 9986105 and 9985535 and Chrysler MS-9224 and MS-9417. Also replaces Honda Genuine MTF and MTF-94 used in some Range Rovers, MGs and Mini Coopers. Not for use in engines or wet clutches.

### **SYNTHETIC SYNCHROMESH TRANSMISSION FLUID 5W-30**

| <b>Stock #</b> | <b>Pkg./Size</b> | <b>Wt. Lbs.</b> | <b>Cost</b> |
|----------------|------------------|-----------------|-------------|
| MTF-QT         | (1) Quart        | 2.1             | 8.60        |
| MTF-01         | (12) Quarts      | 24.7            | 102.00      |
| MTF-05         | 5-gal. Pail      | 39.2            | 157.00      |



## **Series 2000 Synthetic Chain Case Lubricant**

AMSOIL Series 2000 Chain Case Lubricant provides superior protection and performance for enclosed chains. Ideal for snowmobiles, ATVs and general equipment. Extreme Pressure additives provide extra wear protection. Extends chain life, repels water, and inhibits rust, oxidation and foam. Superior low-temperature starting, performance and protection.

| <b>Stock#</b> | <b>Pkg./Size</b>   | <b>Wt.Lbs.</b> | <b>Cost</b> |
|---------------|--------------------|----------------|-------------|
| TCC-BE        | (1) 12-oz. Bottle  | 1.0            | 6.15        |
| TCC-06        | (6) 12-oz. Bottles | 6.0            | 36.30       |
| TCC-05        | (1) 5-gal. Pail    | 32.4           | 141.50      |

## Semi-Synthetic Bar and Chain Oil

Clings to metal surfaces better than other oils. Delivers unparalleled lubrication and protection.

| Stock# | Pkg./Size       | Wt.Lbs. | Cost  |
|--------|-----------------|---------|-------|
| ABC-QT | (1) Quart       | 2.2     | 3.35  |
| ABC-01 | (12) Quarts     | 26.0    | 39.00 |
| ABC-1G | (1) Gallon      | 8.1     | 13.45 |
| ABC-04 | (4) Gallons     | 32.2    | 52.20 |
| ABC-05 | (1) 5-gal. Pail | 39.2    | 62.25 |

## Propylene Glycol Antifreeze and Engine Coolant

Combines the benefits of biodegradability, low toxicity and all-climate protection. AMSOIL Propylene Glycol Antifreeze and Engine Coolant is safer for kids and pets than ethylene glycol coolants. Offer protection for 750,000 miles/7 years for over-the-road diesel trucks and 250,000 miles/7 years for gasoline vehicles. Compatible with all other major antifreeze products.

| Stock# | Pkg./Size          | Wt.Lbs. | Cost   |
|--------|--------------------|---------|--------|
| ANT-1G | (1) Gallon Bottle  | 9.8     | 26.35  |
| ANT-04 | (4) Gallon Bottles | 39.0    | 103.80 |

To test freeze protection and additive concentration, order antifreeze test strips:

| Stock# | Pkg./Size | Cost |
|--------|-----------|------|
| G-1164 | 50 Strips | 9.20 |
| G-1165 | 6 Strips  | 3.95 |

## Synthetic Compressor Oil

Provides unsurpassed protection and performance in rotary screw, rotary vane, reciprocating and other compressor applications. Compatible with PAO-, ester- and petroleum-based compressor oils. Not compatible with glycol- or silicone-based compressor oils. Call AMSOIL Technical Services at (715) 399-8324 with questions.

### SYNTHETIC COMPRESSOR OIL (ISO 46, SAE 20)

| Stock# | Pkg./Size    | Wt.Lbs. | Cost   |
|--------|--------------|---------|--------|
| PCI-QT | (1) Quart    | 2       | 8.15   |
| PCI-01 | (12) Quarts  | 24      | 96.60  |
| PCI-05 | (1) 5-Gallon | 39      | 146.75 |

### SYNTHETIC COMPRESSOR OIL (ISO 100, SAE 40)

| Stock# | Pkg./Size    | Wt.Lbs. | Cost   |
|--------|--------------|---------|--------|
| PCK-QT | (1) Quart    | 2       | 8.25   |
| PCK-01 | (12) Quarts  | 25      | 97.80  |
| PCK-05 | (1) 5-Gallon | 39      | 153.50 |



## How to Order

### TOLL-FREE TELEPHONE ORDERING

Dial 1-800-956-5695 (Contiguous 48 States Only and Alaska) \*Note: when ordering from Alaska, there is a 7.5% freight surcharge on all products shipped to Alaska. Hours: 7:00 am to 5:00 pm Central Time, Monday through Friday, except for statutory holidays. When calling, please provide your Referral Number (from the back cover of the catalog).

### TECHNICAL QUESTIONS

Direct all technical questions to the AMSOIL Technical Services Department, AMSOIL INC., AMSOIL Bldg., Superior, Wisconsin 54880 or call (715) 399-8324.

### AMSOIL WARRANTY STATEMENT

The use of AMSOIL products will not cause mechanical damage to any mechanically sound equipment when AMSOIL products are used in full compliance with AMSOIL recommendations and instructions. For full warranty statement call 800-956-5695 and order the G-1363 (\$.25).

### SHIPPING AND HANDLING

Orders are subject to the following shipping and handling schedule.

|                 |          |                   |               |
|-----------------|----------|-------------------|---------------|
| up to 3 lbs.    | • \$6.40 | 24 to 39.9 lbs.   | • 40¢ per lb. |
| 3 to 6.9 lbs.   | • \$7.20 | 40 to 59.9 lbs.   | • 35¢ per lb. |
| 7 to 13.9 lbs.  | • \$7.85 | 60 to 99.9 lbs.   | • 33¢ per lb. |
| 14 to 23.9 lbs. | • \$8.90 | 100 lbs. and over | • 30¢ per lb. |

**NOTE:** AMSOIL products cannot be shipped to post office boxes. For products purchased in Alaska, add a 7.5% freight surcharge.

### PRODUCT DAMAGED DURING SHIPPING

If there is visible damage to your order upon delivery, refuse the order. It will be returned to AMSOIL INC. for inspection and a new order will be sent at no extra charge to you. If you discover hidden damage after accepting delivery of your order, call 1-800-956-5695 for damaged product instructions.

### SALES TAX INFORMATION

AMSOIL INC. has an established Sales Tax Rate for all states. Because AMSOIL is sometimes required to collect city, county and other taxes as well, the tax rate AMSOIL charges may be higher than just your sales tax. AMSOIL also collects any additional taxes on lubricating products required by certain states.

**NOTE:** Freight charges are subject to sales tax in Connecticut, Georgia, Nebraska, Nevada and Wisconsin. In California, Rhode Island, Texas and Utah, excise taxes are added to the product total before figuring your sales tax.

### RETURN/EXCHANGE GUIDELINES

- Must be currently marketed products in resalable condition.
- All products in resalable condition can be returned within 30 days for a full refund of the purchase price and sales tax.
- Products purchased over 30 days, but less than 90 days, may be exchanged for other product of equal or greater value, less a 20 percent restocking fee.
- Customers wishing to return products after 30 days or to exchange products after 90 days will be advised to contact their Dealer for assistance.
- Shipping and handling fees are the customer's responsibility.
- Special order items cannot be exchanged or returned.

Call 1-800-956-5695 for instructions prior to returning any product.

### HAWAII

AMSOIL products are available through independent AMSOIL Dealers and selected retailers. To order in Hawaii, check your local Yellow Pages or call 1-800-777-8491 for the name of your nearest AMSOIL Dealer.

### OIL FILTER, AIR FILTER OR FLUID CAPACITY QUESTIONS

For oil and air filter specifications, consult your owner's manual or order the AMSOIL Filter Applications and Cross Reference Guide (G-3000, 2.4 lbs, \$7.60). Assistance also available when placing order. For fluid capacity levels, consult your owner's manual or order the AMSOIL Product Selection Guide (G-50, .6 lb, \$8.90). Or call the AMSOIL Technical Service Department at 715-399-8324, 7 a.m. to 5 p.m. Central Time, M - F.

### QUESTIONS

For questions on shipping, sales tax, damaged products, instructions, etc., call (715) 392-7101, 8 a.m. to 5 p.m. Central Time, M - F, except for statutory holidays.

*Prices subject to change without notice.*

**Start buying  
wholesale today**

## **Preferred Customer Program**

Ten dollars gets you a six-month trial Preferred Customer membership for buying AMSOIL products at wholesale prices. Here's what Preferred Customers get:

- Preferred Customers buy AMSOIL products at wholesale prices. If you buy \$100 of AMSOIL products a year, a Preferred Customer membership will save you money!
- Preferred Customers can register over the telephone (1-800-777-7094). Have referral number from back page ready when calling (if one is listed).
- Preferred Customers may change their membership to become an AMSOIL Dealer at any time.
- Preferred Customers receive a kit with information on more AMSOIL products and package sizes, and the monthly AMSOIL product, racing and application magazine, the *AMSOIL Action News*.



## **Want More? Become an AMSOIL Dealer**

AMSOIL products are sold through independent Dealers.

People like you. People who want extra money, something to do in their spare time, even a full-time business.

You can start an independent AMSOIL Dealership for under \$20 . . . and put as much — or as little — time into it as you want.

There's always plenty of support . . . never any hassles. No quotas to fill. No inventory requirements. You're your own boss. It's the ideal business opportunity.

You can sell to commercial and retail accounts as well as individuals. It's up to you . . . extra money, a full-time income or rock-bottom prices on AMSOIL products.

**Call 1-800-956-5695 and order a free G-1284 for information on the AMSOIL Preferred Customer Program and on becoming an independent AMSOIL Dealer.**



## Synthetic Heavy-Duty Grease

Extreme-pressure, moly-fortified. Provides outstanding protection for four wheel drive steering knuckles, spring shackles and other components operating in high-load conditions.

### SYNTHETIC HEAVY-DUTY GREASE

#### N.L.G.I. No. 2, GC/LB

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| GHD-CR | (1) 14-oz. Cartridge   | 1.1     | 5.50  |
| GHD-10 | (10) 14-oz. Cartridges | 11.0    | 54.00 |

#### N.L.G.I. No. 1, GC/LB

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| GHB-CR | (1) 14-oz. Cartridge   | 1.0     | 5.50  |
| GHB-10 | (10) 14-oz. Cartridges | 10.0    | 54.00 |

## Synthetic Multi-Purpose Grease

Reduces friction and wear in high-speed/high-temperature components such as automotive wheel bearings and electric motors. It keeps components running clean and trouble-free for outstanding performance and long life.

### SYNTHETIC MULTI-PURPOSE GREASE

#### N.L.G.I. No. 2, GC/lb

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| GLC-CR | (1) 14-oz. Cartridge   | 1.1     | 5.05  |
| GLC-10 | (10) 14-oz. Cartridges | 11.0    | 49.50 |
| GLC-TB | (1) 8-oz. Tube         | 0.7     | 5.05  |
| GLC-08 | (12) 8-oz. Tubes       | 8.0     | 59.40 |

#### N.L.G.I. No. 1, GC/lb

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| GLB-CR | (1) 14-oz. Cartridge   | 1.0     | 5.05  |
| GLB-10 | (10) 14-oz. Cartridges | 10.0    | 49.50 |

## Synthetic Water Resistant Grease


Resists water washout and degradation. Unparalleled protection for boat trailer wheel bearings and other components frequently exposed to water.

### SYNTHETIC WATER RESISTANT GREASE

#### N.L.G.I. No. 2

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| GWR-CR | (1) 14-oz. Cartridge   | 1.1     | 6.00  |
| GWR-10 | (10) 14-oz. Cartridges | 11.0    | 59.00 |

## Grease That Won't Wash Away.

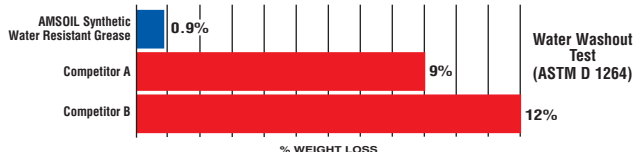

## Series 2000 Synthetic Racing Grease

Ultimate protection for hard-driven, high-performance vehicles. Dramatically reduces friction and wear for improved performance.

### SERIES 2000 SYNTHETIC RACING GREASE N.L.G.I. No. 2, GC/LB

| Stock# | Pkg./Size              | Wt.Lbs. | Cost   |
|--------|------------------------|---------|--------|
| GRG-CR | (1) 14-oz. Cartridge   | 1.1     | 10.80  |
| GRG-10 | (10) 14-oz. Cartridges | 11.0    | 108.00 |

## X-Treme Synthetic Food Grade Grease

An ultra-premium lubricant designed for high levels of protection in food and pharmaceutical industry equipment. USDA H-1 rated for incidental contact with food.

### X-TREME SYNTHETIC FOOD GRADE GREASE N.L.G.I. NO. 2 HIGH TEMPERATURE EP

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| GXC-CR | (1) 14-oz. Cartridge   | 1.1     | 8.65  |
| GXC-10 | (10) 14-oz. Cartridges | 11.0    | 85.80 |

## Synthetic Multi-Purpose Spray Grease

The same great AMSOIL Synthetic Multi-Purpose Grease in a convenient spray formulation. Ideal for greasing hard-to-reach equipment such as hinges, springs and many other common applications.

### SYNTHETIC MULTI-PURPOSE SPRAY GREASE

| Stock# | Pkg./Size                   | Wt.Lbs. | Cost  |
|--------|-----------------------------|---------|-------|
| GLC-SC | (1) 10.5-fl. oz Spray Can   | .8      | 6.55  |
| GLC-16 | (12) 10.5-fl. oz Spray Cans | 9.0     | 77.40 |

---

*"Before using AMSOIL, two of our race cars were suffering wheel bearing seizure on a regular basis. This year, using AMSOIL Wheel Bearing Grease, our problems stopped totally."*

---

H.C., HOUSTON, TX

---





## **Series 2000 Octane Boost**

AMSOIL Series 2000 Octane Boost improves the performance of all two-cycle and four-cycle gasoline fueled engines. AMSOIL Octane Boost maximizes power, reduces engine knock and improves ignition and engine response. Helps fuel burn cleaner and removes carbon deposits. Excellent as a lead substitute at same treat rates in collector automobiles, older off-road equipment, 4x4 off-road vehicles and gasoline racing vehicles. One bottle treats 15 gallons.

| Stock# | Pkg./Size          | Wt.Lbs. | Cost  |
|--------|--------------------|---------|-------|
| AOB-BE | (1) 12-oz. Bottle  | 1.0     | 8.95  |
| AOB-06 | (6) 12-oz. Bottles | 5.0     | 53.10 |

**Industry's Most  
Advanced Formulation  
Improves Fuel  
Economy**



## **PI Performance Improver**

PI Performance Improver is the most potent gasoline additive available today. As a concentrated detergent, it is unsurpassed in cleaning combustion chamber deposits, intake valve deposits and port fuel injector deposits, eliminating the need for expensive fuel injector cleaning procedures. It is ideal for use prior to emissions inspections, and it helps maintain peak engine efficiency, fuel economy, power and drivability in newer low mileage engines. In engines with accumulated deposits, PI provides improved fuel mileage up to 5.7%, reduced emissions, restored power and performance, reduced need for higher octane fuel, reduced carbon rap and pre-ignition, better drivability and smoother operation after only one tank of gasoline. Treat one full tank of gas every 4,000 miles or 100 hours of service.

| Stock# | Pkg./Size           | Wt. Lbs. | Cost   |
|--------|---------------------|----------|--------|
| API-CN | (1) 12-oz. Bottle   | 0.9      | 8.70   |
| API-12 | (12) 12-oz. Bottles | 11.2     | 103.20 |



## **Gasoline Stabilizer**

AMSOIL Gasoline Stabilizer keeps fuel from deteriorating during storage. AMSOIL Gasoline Stabilizer reduces the oxidation process and prevents varnish and gum buildup in gasoline. These contaminants can clog injectors, stick floats and cause poor engine performance. Treat rate is one ounce with every 2.5 gallons of fuel. Treats 40 gallons total.

| Stock# | Pkg./Size          | Wt.Lbs. | Cost  |
|--------|--------------------|---------|-------|
| AST-BF | (1) 16-oz. Bottle  | 1.2     | 8.00  |
| AST-16 | (6) 16-oz. Bottles | 7.0     | 47.40 |

## Engine Fogging Oil

Superior film retention provides stored equipment with long-term protection against corrosion and dry starts, extending engine life and reducing operating expenses. Its aerosol spray formulation offers easy and clean applications, while reaching more components and offering complete distribution of the oil, something especially beneficial in applications with horizontal cylinder orientation, such as outboard motors.

| Stock# | Pkg./Size               | Wt. Lbs. | Cost  |
|--------|-------------------------|----------|-------|
| FOG-SC | (1) 12-oz. Aerosol Can  | 0.8      | 5.45  |
| FOG-06 | (6) 12-oz. Aerosol Cans | 5.0      | 32.10 |

## Diesel Concentrate

Total system cleaner and lubricity improver for all types of heavy and light-duty diesel engines. Formulated with Ultra Low Sulfur Diesel fuel (ULSD) in mind, Diesel Concentrate controls the problems created by EGR systems by neutralizing acids during combustion, minimizing acidic cylinder wear, reducing the rate of TBN depletion and maintaining oil quality. Cleans fuel injectors and combustion chamber for improved efficiency and better sealing and minimizes soot loading. Improves the oxidation and thermal stability of diesel fuel, improves fuel economy by up to five percent, restores horsepower and protects against water contamination. Compatible with all types of exhaust emission systems, including diesel particulate filters (DPF's). Also recommended in heating oil furnace applications.

| Stock# | Pkg./Size           | Wt. Lbs. | Cost   |
|--------|---------------------|----------|--------|
| ADF-CN | (1) 16-oz. Bottle   | 1.2      | 6.65   |
| ADF-16 | (12) 16-oz. Bottles | 14.0     | 78.60  |
| ADF-05 | (1) 5-gal. Pail     | 39.7     | 175.25 |

## Diesel Cold Flow Improver

Recommended for low temperature applications below 40°F. Effectively modifies wax crystal formation at low temperatures to depress diesel fuel pour point and improve cold flow filtration properties. Lowers the cold filter plugging point by as much as 20°F and decreases the need for #1 diesel fuel diluted with kerosene. Contains jet fuel-type deicer to help prevent ice formation in fuels contaminated with water. Compatible with diesel particulate filters (DPF's).

| Stock# | Pkg./Size           | Wt. Lbs. | Cost   |
|--------|---------------------|----------|--------|
| DFF-CN | (1) 16-oz. Bottle   | 1.2      | 6.30   |
| DFF-16 | (12) 16-oz. Bottles | 14.2     | 74.40  |
| DFF-05 | (1) 5-gal. Pail     | 40.2     | 167.50 |

## Cetane Boost Diesel Fuel Additive

Improves combustion efficiency to increase power in diesel engines. Raises Cetane three to seven numbers. Also improves low-temperature starting, fuel ignition quality and reliability. Treats up to 200 gallons.

| Stock# | Pkg./Size           | Wt. Lbs. | Cost   |
|--------|---------------------|----------|--------|
| ACB-CN | (1) 16-oz. Bottle   | 1.3      | 7.20   |
| ACB-16 | (12) 16-oz. Bottles | 15.0     | 85.20  |
| ACB-05 | (1) 5-gal. Pail     | 43.3     | 192.75 |



Up to 5%  
better fuel  
economy





## Ea Air Filters

AMSOIL Ea Air Filters incorporate nanofiber technology which has been used exclusively in severe and heavy duty applications. AMSOIL Ea Filters are more efficient and have greater capacity than cellulose and wet gauze filters, effectively extending engine and filter life and reducing engine wear.

Cleaning of Ea Filters with a shop vacuum or low pressure shop air is recommended every 25,000 miles or one year, and they have a total service life of 100,000 miles or four years.

AMSOIL can find your vehicle's filter number or cross reference filters for your vehicle from the manufacturer part number of the filters you are currently using. Call 1-800-956-5695 (Monday - Friday, 8 a.m. - 5 p.m. CST) with vehicle or filter information when ordering. You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed), or order the Filter Applications and Cross Reference Guide (G-3000, \$7.60). For convenience, complete the form on the bottom of the next page.

Ea Air and Oil Filters are available to Dealers and Preferred Customers in case lots. See page 25 for information on becoming a Dealer or Preferred Customer.


### Ea Air Filters - Single Filters

| Stock# | Wt. Lbs. | Cost  |
|--------|----------|-------|
| EaA-04 | 0.9      | 34.15 |
| EaA-08 | 1.0      | 38.10 |
| EaA-22 | 0.9      | 29.55 |
| EaA-23 | 1.1      | 29.55 |
| EaA-24 | 0.9      | 34.15 |
| EaA-25 | 2.1      | 38.10 |
| EaA-29 | 1.0      | 38.10 |
| EaA-31 | 1.5      | 34.15 |
| EaA-32 | 1.1      | 29.55 |
| EaA-47 | 0.6      | 29.55 |
| EaA-49 | 0.8      | 34.15 |
| EaA-51 | 1.9      | 38.10 |
| EaA-52 | 0.7      | 38.10 |
| EaA-74 | 0.8      | 34.15 |
| EaA-81 | 0.7      | 29.55 |
| EaA-82 | 0.7      | 29.55 |
| EaA-83 | 1.3      | 47.45 |

### Ea Air Filters - Single Filters

| Stock#  | Wt. Lbs. | Cost  |
|---------|----------|-------|
| EaA-86  | 0.6      | 29.55 |
| EaA-87  | 0.6      | 29.55 |
| EaA-88  | 0.7      | 34.15 |
| EaA-101 | 0.9      | 34.15 |
| EaA-103 | 2.5      | 59.10 |
| EaA-104 | 1.2      | 47.45 |
| EaA-106 | 1.9      | 47.45 |
| EaA-111 | 2.3      | 59.10 |
| EaA-112 | 2.8      | 59.10 |
| EaA-118 | 1.3      | 38.10 |
| EaA-121 | 1.8      | 47.45 |
| EaA-122 | 1.1      | 38.10 |
| EaA-123 | 1.7      | 47.45 |
| EaA-124 | 0.8      | 38.10 |
| EaA-126 | 1.0      | 34.15 |
| EaA-127 | 0.8      | 34.15 |
| EaA-128 | 1.1      | 38.10 |
| EaA-129 | 1.1      | 34.15 |
| EaA-170 | 1.0      | 34.15 |
| EaA-176 | 1.5      | 47.45 |
| EaA-189 | 1.5      | 47.45 |
| EaA-191 | 1.1      | 38.10 |
| EaA-200 | 1.0      | 38.10 |
| EaA-201 | 0.8      | 38.10 |
| EaA-202 | 0.8      | 29.55 |
| EaA-203 | 1.9      | 47.45 |
| EaA-204 | 1.5      | 47.45 |
| EaA-205 | 1.2      | 34.15 |
| EaA-206 | 0.9      | 34.15 |
| EaA-207 | 1.0      | 34.15 |
| EaA-208 | 1.0      | 34.15 |
| EaA-289 | 0.9      | 38.10 |
| EaA-416 | 1.0      | 34.15 |
| EaA-419 | 0.9      | 38.10 |
| EaA-484 | 1.0      | 38.10 |
| EaA-524 | 0.7      | 34.15 |
| EaA-728 | 1.7      | 47.45 |

### Efficiency Measured at 0.8 Microns

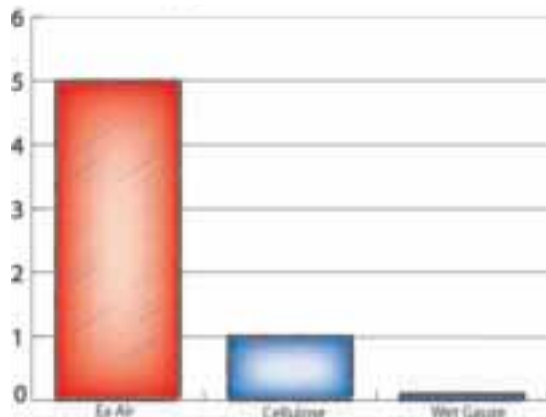

AMSOIL Ea Air Filter media removes 5 times more dust than traditional cellulose filters and 50 times more dust than wet gauze.

## Ea Oil Filters

AMSOIL Ea Oil Filters are the highest efficiency filters available to the auto/light truck market. Featuring advanced full synthetic nanofiber technology, Ea Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear. When used in conjunction with AMSOIL Synthetic Motor Oil in gasoline and diesel vehicles, Ea Oil Filters are recommended for up to 25,000 miles or one year, whichever comes first, in normal service or up to 15,000 miles or one year, whichever comes first, in severe service.




### Ea Oil Filters - Single Filters

| Stock# | Wt. Lbs. | Cost  |
|--------|----------|-------|
| EaO-09 | 0.6      | 15.30 |
| EaO-10 | 0.6      | 15.30 |
| EaO-11 | 0.9      | 15.95 |
| EaO-12 | 0.6      | 15.95 |
| EaO-13 | 0.6      | 16.65 |
| EaO-14 | 0.6      | 16.65 |
| EaO-15 | 1.0      | 15.30 |
| EaO-20 | 0.7      | 15.30 |
| EaO-21 | 0.9      | 17.30 |
| EaO-22 | 1.1      | 23.20 |
| EaO-23 | 0.8      | 16.65 |
| EaO-24 | 0.6      | 15.95 |
| EaO-25 | 1.0      | 15.30 |
| EaO-26 | 1.3      | 23.20 |
| EaO-27 | 1.1      | 17.30 |
| EaO-29 | 0.7      | 16.65 |
| EaO-30 | 1.0      | 16.65 |
| EaO-31 | 1.0      | 17.30 |
| EaO-32 | 0.8      | 15.30 |
| EaO-33 | 0.7      | 15.95 |
| EaO-34 | 0.8      | 17.30 |
| EaO-35 | 0.9      | 17.30 |
| EaO-36 | 0.8      | 16.65 |
| EaO-37 | 0.7      | 17.30 |
| EaO-38 | 0.7      | 17.30 |
| EaO-39 | 1.2      | 17.30 |
| EaO-40 | 1.0      | 17.30 |
| EaO-41 | 1.0      | 17.30 |
| EaO-42 | 1.0      | 15.30 |
| EaO-43 | 1.0      | 17.30 |
| EaO-44 | 1.0      | 15.95 |
| EaO-45 | 1.1      | 17.30 |
| EaO-46 | 0.7      | 17.30 |
| EaO-47 | 0.7      | 23.20 |
| EaO-52 | 1.0      | 17.30 |

### Ea Oil Filters - Single Filters

| Stock# | Wt. Lbs. | Cost  |
|--------|----------|-------|
| EaO-57 | 0.7      | 15.30 |
| EaO-58 | 0.7      | 16.65 |
| EaO-59 | 0.8      | 15.95 |
| EaO-64 | 0.6      | 15.30 |
| EaO-76 | 1.6      | 23.20 |
| EaO-80 | 2.0      | 22.00 |
| EaO-88 | 0.5      | 31.00 |
| EaO-96 | 1.3      | 16.65 |
| EaO-99 | 2.2      | 23.20 |

### Filter Efficiency @ 15 Microns per ISO 4548-12

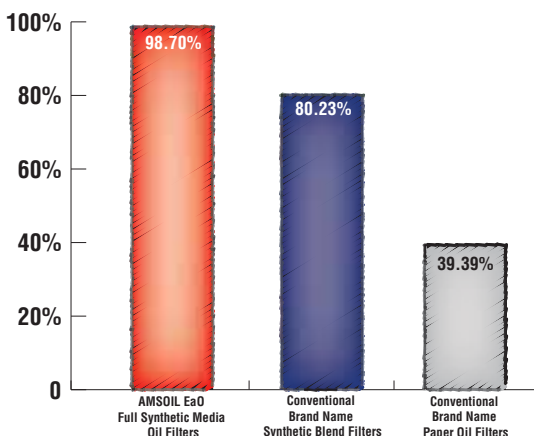

Fill in your vehicle information. Then call 1-800-956-5695 (Monday – Friday, 8 a.m. – 5 p.m. CST) You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed), or order the Filter Applications and Cross Reference Guide (G-3000, \$7.60) to determine your AMSOIL Oil and Air Filters.

Make \_\_\_\_\_ Year \_\_\_\_\_ Model \_\_\_\_\_

Engine \_\_\_\_\_

Your AMSOIL Oil Filter is **EaO-**\_\_\_\_\_ Your AMSOIL Air Filter is **EaA-**\_\_\_\_\_

Your WIX Oil Filter is \_\_\_\_\_ Your WIX Air Filter is \_\_\_\_\_

Your Donaldson Oil Filter is \_\_\_\_\_ Your Donaldson Air Filter is \_\_\_\_\_



## Ea Universal Air Induction Filters

AMSOIL Ea Air Induction Filters are constructed of advanced nanofiber technology and fit most popular air intake systems on the market, providing improved cold air intake and excellent efficiency for superior engine protection and performance. Ea Air Induction Filters are cleanable and remain serviceable for long filter life, saving money on filter costs. Cleaning of Ea Air Induction Filters with a shop vacuum or low pressure shop air is recommended when designated by the restriction gauge or according to operating conditions.

Call 1-715-392-7101 (Monday-Friday, 8 a.m. - 5 p.m. CST) for application information

| Stock#   | Wt. Lbs. | Cost  | Stock#   | Wt. Lbs. | Cost  |
|----------|----------|-------|----------|----------|-------|
| EaAU3050 | 1.5      | 47.70 | EaAU4075 | 2.0      | 60.70 |
| EaAU3051 | 1.4      | 47.70 | EaAU4091 | 3.6      | 91.35 |
| EaAU3090 | 2.0      | 67.70 | EaAU4095 | 2.2      | 64.70 |
| EaAU3555 | 0.9      | 59.70 | EaAU4178 | 2.5      | 67.70 |
| EaAU3560 | 1.6      | 50.00 | EaAU4510 | 2.8      | 74.70 |
| EaAU3570 | 0.9      | 54.70 | EaAU6065 | 1.8      | 58.70 |
| EaAU3590 | 2.0      | 67.70 | EaAU6075 | 1.8      | 64.70 |
| EaAU4090 | 1.1      | 61.70 | EaAU6080 | 1.7      | 66.70 |
| EaAU4560 | 1.3      | 50.00 | EaAU6081 | 1.7      | 64.70 |
| EaAU4070 | 1.4      | 59.70 |          |          |       |

**NEW!**



## EaAR Air Filters

Specially designed for carbureted racing and street rod applications, AMSOIL EaAR Air Filters are composed of advanced nanofiber media for higher dirt-holding capacity and lower pressure drop compared to traditional filter medias. Provide greater air flow and efficiency than other assemblies of this type. EaAR Filters are cleanable and

remain serviceable for long filter life. Cleaning of EaAR Air Filters with a shop vacuum or low pressure shop air is recommended when designated by the restriction gauge or according to operating conditions.

Call 1-715-392-7101 (Monday-Friday, 8 a.m. - 5 p.m. CST) for application information

| Stock #  | Diameter (in.) | Height (in.) | Description                | Wt. Lbs. | Cost   |
|----------|----------------|--------------|----------------------------|----------|--------|
| EaAR2102 | 14             | 2 3/4        | Complete Filter Kit        | 4.7      | 128.00 |
| EaAR2103 | 14             | 3 5/8        | Complete Filter Kit        | 5.0      | 128.00 |
| EaAR2104 | 14             | 4 11/16      | Complete Filter Kit        | 5.3      | 128.00 |
| EaAR2105 | 14             | 5 11/16      | Complete Filter Kit        | 5.6      | 134.70 |
| EaAR2106 | 14             | 6 7/8        | Complete Filter Kit        | 5.9      | 134.70 |
| EaAR2140 | 14             | N/A          | Replacement Base for Kit   | 1.0      | 50.00  |
| EaAR2141 | 14             | 7/8          | Replacement Lid for Kit    | 1.7      | 68.00  |
| EaAR2142 | 14             | 2            | Replacement Filter for Kit | 2.0      | 50.00  |
| EaAR2143 | 14             | 3            | Replacement Filter for Kit | 2.3      | 50.00  |
| EaAR2144 | 14             | 4            | Replacement Filter for Kit | 2.6      | 50.00  |
| EaAR2145 | 14             | 5            | Replacement Filter for Kit | 2.9      | 52.70  |
| EaAR2146 | 14             | 6            | Replacement Filter for Kit | 3.2      | 52.70  |

## Ea Motorcycle Oil Filters

AMSOIL Ea Motorcycle Oil Filters feature full synthetic nanofiber technology, providing superior protection for motorcycles, ATVs and four-stroke personal watercraft, snowmobiles and outboard motors. Ea Motorcycle Oil Filters last longer, stop smaller dirt particles and offer less restriction, extending equipment and filter life and improving performance. Ea Motorcycle Oil Filters are fluted for easy removal from motorcycles. Available in black or chrome.



Call 1-800-956-5695 (Monday-Friday, 8 a.m. - 5 p.m. CST) for application information or order the AMSOIL Power Sports Application Guide (G-2135, \$2.25).

| Stock#   | Wt. Lbs. | Cost  | Stock#   | Wt. Lbs. | Cost  |
|----------|----------|-------|----------|----------|-------|
| EaOM102  | 0.8      | 10.90 | EaOM133  | 1.0      | 14.75 |
| EaOM103  | 0.6      | 14.75 | EaOM133C | 1.0      | 17.00 |
| EaOM103C | 0.6      | 17.00 | EaOM134  | 0.9      | 13.45 |
| EaOM109  | 0.6      | 15.35 | EaOM134C | 0.9      | 15.10 |
| EaOM122  | 0.8      | 15.35 | EaOM135  | 0.9      | 12.50 |
| EaOM122C | 0.8      | 17.00 | EaOM135C | 0.9      | 15.10 |
| EaOM132  | 0.7      | 13.45 | EaOM136C | 0.9      | 13.80 |
| EaOM132C | 0.7      | 15.10 |          |          |       |

"C" designates that the filter is chrome.

## Ea Motorcycle Air Filters

AMSOIL Ea Motorcycle Air Filters replace Harley Davidson OEM and S&S filters, incorporating nanofiber technology that offers superior efficiency, air flow and capacity for extended equipment and filter life and enhanced performance. Ea Motorcycle Air Filters are cleanable and remain serviceable for up to four years, saving money on filter costs. Cleaning of Ea Motorcycle Filters with a shop vacuum or low pressure shop air is recommended every year or according to operating conditions.

| Stock# | Wt. Lbs. | Cost  | Stock#    | Wt. Lbs. | Cost  |
|--------|----------|-------|-----------|----------|-------|
| EaAM22 | 1.0      | 38.70 | EaAM33096 | 1.1      | 60.35 |
| EaAM23 | 1.0      | 37.35 | EaAM33104 | 2.0      | 72.95 |
| EaAM24 | 0.4      | 49.00 | EaAM33196 | 1.1      | 62.70 |
| EaAM25 | 1.5      | 67.95 | EaAM43701 | 1.3      | 50.00 |
| EaAM26 | 1.4      | 84.30 | EaAM46199 | 1.4      | 76.00 |
| EaAM27 | 0.8      | 74.35 | EaAM46299 | 1.4      | 74.30 |



Call 1-800-956-5695 (Monday - Friday, 8 a.m. - 5 p.m. CST) for application information or order the AMSOIL Power Sports Application Guide (G-2135, \$2.25).

**NEW!**



See [www.amsoil.com/catalogUS](http://www.amsoil.com/catalogUS) for pricing information. For application and pricing information, call 1-800-956-5695 (Monday - Friday, 8 a.m. - 5 p.m. Central Time), contact the AMOIL Dealer listed on the back of your catalog (if one is listed) or order the AMOIL Power Sports Application Guide (G-2135, \$2.25).

## **Twin Air Filters** **(FOR DIRT BIKES AND ATVs)**

AMSOIL offers premium Twin Air Filters for dirt bike and ATV applications.

Twin Air Filters are constructed of two layers of open-pore foam to provide maximum filtration and superior air flow. Exclusively formulated adhesive withstands repeated cleanings. Wash filters and reapply filter oil for years of trouble-free miles.

**More Air Flow Traps More Dirt Improves Performance**

**NEW!**



## **Twin Air Liquid Power Filter Oil**

Starts thin for a deep, even penetration, then dries to an even coating. This high-tack shield traps dirt, grit and dust. Available in spray or liquid form.

| Stock#  | Pkg./Size                 | Wt. Lbs. | Cost  |
|---------|---------------------------|----------|-------|
| 159015  | (12) Liters               | 2.0      | 18.50 |
| 159016M | (12) 500-ml Spray Bottles | 2.0      | 15.95 |

**NEW!**



## **Twin Air BIO Liquid Power Filter Oil**

Biodegradable air filter oil is the first biodegradable air filter oil that works in all riding conditions. Prevents dirt, dust and water from entering carburetors. Its alcohol base allows easy, even penetration, then dissipates quickly to form a super-sticky, dirt-grabbing shield. Available in spray or liquid form.

| Stock#  | Pkg./Size                 | Wt. Lbs. | Cost  |
|---------|---------------------------|----------|-------|
| 159017  | (12) Liters               | 2.0      | 19.95 |
| 159018M | (12) 500-ml Spray Bottles | 2.0      | 16.95 |

## **Twin Air Liquid Dirt Remover**

Formulated to quickly cut through Liquid Power, loosen dirt and flush filters clean. Will not harden or damage filter foam. Available in spray or liquid form.

| Stock# | Pkg./Size                 | Wt. Lbs. | Cost  |
|--------|---------------------------|----------|-------|
| 159002 | (4) 4-liter Bottles       | 8.0      | 24.95 |
| 159006 | (12) 500-ml Spray Bottles | 2.0      | 15.95 |



## **Twin Air BIO Dirt Remover**

Biodegradable air filter cleaner can be used with a washing machine or when washing by hand in a bucket. Granular water-soluble cleaner can go right down the drain without clogging or harming the environment.

| Stock# | Pkg./Size           | Wt. Lbs. | Cost  |
|--------|---------------------|----------|-------|
| 159004 | (12) 800-ml Bottles | 2.0      | 16.95 |



## **Twin Air Contact Cleaner**

Designed to clean the air box and surrounding areas. Quickly removes excess dirt and grime.

| Stock# | Pkg./Size                 | Wt. Lbs. | Cost |
|--------|---------------------------|----------|------|
| 159003 | (12) 500-ml Spray Bottles | 2.0      | 8.95 |



## **Twin Air System**

Comes with everything needed to clean and care for Twin Air Filters, including cleaning tub, oiling tub, Liquid Dirt Remover (4 liters), Liquid Power Filter Oil (1 liter), Contact Cleaner (500 ml) and rubber gloves. Twin Air BIO



System includes cleaning tub, oiling tub, BIO Dirt Remover (800 ml), BIO Liquid Power Filter Oil (1 liter), Contact Cleaner (500 ml) and rubber gloves.

| Stock#    | Pkg./Size   | Wt. Lbs. | Cost  |
|-----------|-------------|----------|-------|
| 159000    | (1) Kit     | 16.0     | 74.95 |
| 159000BIO | (1) BIO Kit | 12.0     | 74.95 |

## WIX Filters

AMSOIL also offers premium WIX filters to complement the AMSOIL filter line and help meet virtually every automotive and light truck need.

**OIL FILTERS • AIR FILTERS • FUEL FILTERS  
RACING FILTERS • TRANSMISSION FILTERS**

AMSOIL can find your vehicle's filter number or cross reference filters for your vehicle from the manufacturer part number of the filters you are currently using. Call 1-800-956-5695 (Monday - Friday, 8 a.m. - 5 p.m. CST) with vehicle or filter information when ordering. You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed), or order the Filter Applications and Cross Reference Guide (G-3000, \$7.60). For convenience, complete the form on the bottom of page 31.

## AMS-Oiler™ Pre-Charger

Puts an end to dry-engine starting. Motor oil is injected directly on bearings and other wear sensitive surfaces upon turning the ignition key. Performs reliably in any personal, commercial or industrial application.

The AMK-01 is designed for use with the AMSOIL BMK-13 or 15 through 18 Dual Remote systems.

The AMK-02 can be used with any engine application and mounts at any angle.

| Stock# | Pkg./Size                       | Wt.Lbs. | Cost   |
|--------|---------------------------------|---------|--------|
| AMK-01 | (1) AMS-Oiler (By-Pass mounted) | 13.0    | 338.00 |
| AMK-02 | (1) AMS-Oiler (stand alone)     | 13.0    | 400.00 |

## Ford 6.0L Diesel Fuel Filter

The FFK-60 Fuel Filter is designed for the Ford 6.0L Diesel PowerStroke™ engine. Incorporates both a primary and secondary filter for maximum fuel cleanliness.

### FFK-60 FUEL FILTER

#### Ford 6.0L Diesel PowerStroke™ Applications

| Stock# | Pkg./Size       | Wt.Lbs. | Cost  |
|--------|-----------------|---------|-------|
| FFK-60 | (1) Fuel Filter | 2.0     | 60.00 |

## Ford 6.0L Diesel Oil Filter

The EaO-88 is the world's first oil filter cartridge for diesel applications using advanced submicron full synthetic media. Designed for 2003-2006 Ford 6.0L diesel engines, the EaO-88 provides an efficiency of 98.7% at 16 microns, significantly higher than the OEM filter.

### EAO-88 OIL FILTER

#### Ford 6.0L Diesel PowerStroke™ Applications

| Stock# | Pkg./Size      | Wt.Lbs. | Cost  |
|--------|----------------|---------|-------|
| EaO-88 | (1) Oil Filter | 0.5     | 31.00 |

**World's first  
oil filter cartridge for  
diesel applications using  
advanced submicron full  
synthetic media**

## PowerCore® Air Filters

The rugged structure of PowerCore® filters features an innovative, layered, fluted filter media which allows air to enter an open flute while forcing it out an adjacent flute, allowing only clean air into the engine. Dirty air is effectively filtered and cleaned in only one pass through the media. Ten times more efficient than standard filter designs.

PowerCore® is a registered trademark of Donaldson Company Inc. These filters are manufactured by Donaldson for AMSOIL.

### Ford 6.0L Diesel PowerStroke™ Air Filter

| Stock#  | Pkg./Size                 | Wt.Lbs. | Cost  |
|---------|---------------------------|---------|-------|
| P603577 | (1) PowerCore® Air Filter | 4.8     | 71.80 |

### Hummer H2 6.0L Vortec™ Air Filter

| Stock# | Pkg./Size                 | Wt.Lbs. | Cost  |
|--------|---------------------------|---------|-------|
| PCF-H2 | (1) PowerCore® Air Filter | 2.7     | 69.95 |



## Donaldson 7.3L PowerStroke™ Diesel Air Induction System

Replaces the present air intake system and provides unmatched performance and filtering efficiency on 1999 to 2003 model year Ford F-250 to F-550 Super Duty trucks and SUVs with 7.3L PowerStroke™ Diesel engines.

### Donaldson 7.3L PowerStroke™ Diesel Air Induction System

| Stock# | Pkg./Size                | Wt.Lbs. | Cost   |
|--------|--------------------------|---------|--------|
| PCIS73 | (1) Air Induction System | 14.0    | 300.00 |



## Donaldson Heavy-Duty Filters

AMSOIL offers premium Donaldson oil, air, fuel, coolant and hydraulic filters for diesel and heavy duty applications. Donaldson Endurance™ Air Filters with exclusive nanofiber technology and Donaldson Endurance Oil Filters with premium advanced synthetic media technology deliver significantly higher efficiency and capacity than conventional filters, extending engine and filter life. P-Series oil and air filters offer premium filtration at a competitive price, featuring advanced media designed to trap wear-causing contaminants and extend equipment life.



AMSOIL can find your vehicle's filter number or cross reference filters for your vehicle from the manufacturer part number of the filters you are currently using. Call 1-800-956-5695 (Monday – Friday, 8 a.m. – 5 p.m. CST) with vehicle or filter information when ordering. You may also contact the AMSOIL Dealer listed on the back of your catalog (if one is listed), or order the Filter Applications and Cross Reference Guide (G-3000, \$7.60). For convenience, complete the form on the bottom of page 31.



## EaBP By-Pass Filters

Engine wear is caused by dirt and agglomerated soot particles larger than 5 microns. AMSOIL EaBP Filters are high efficiency by-pass filters that also remove soot. The two stage pleated and layered cellulose/full synthetic media has an efficiency rating of 98.7 percent at two microns. These filters remove 39 percent of soot contaminants less than one micron. At normal operating RPMs the EaBP Filter will filter all of the oil in a typical five quart sump in less than 10 minutes.

Some mechanical ability required for installation. Yellow mounting stand for demonstration purposes only; not included.

### \*SPIN-ON BY-PASS OIL FILTRATION KIT

| Stock# | Pkg./Size                   | Wt. Lbs | Cost   |
|--------|-----------------------------|---------|--------|
| BMK-11 | (1) Universal Mounting Kit  | 3.4     | 174.00 |
| BMK-13 | (1) Reversible Remote Mount | 9.0     | 201.00 |

\*The BMK-11 kit includes a filter mount, 8' hose and mounting hardware. By-pass filter elements sold separately below.

\*The BMK-13 kit includes a double filter mount, 8' hose, engine adapters and mounting hardware. Filter elements sold separately.

### BY-PASS OIL FILTER REPLACEMENT ELEMENT

| Stock#   | Pkg./Size         | Wt. Lbs | Cost  |
|----------|-------------------|---------|-------|
| EaBP-90  | (1) Length 5.78"  | 2.3     | 35.95 |
| EaBP-100 | (1) Length 7.25"  | 2.7     | 37.65 |
| EaBP-110 | (1) Length 10.44" | 3.5     | 43.70 |

### \*OIL SENDING UNIT ADAPTERS

| Stock# | Pkg./Size                                    | Wt. Lbs | Cost  |
|--------|--|---------|-------|
| BP-44  | (1) Adapter Kit<br>(fits most Japanese cars) | .2      | 13.40 |
| BP-45  | (1) Adapter Kit<br>(fits most European cars) | .2      | 13.40 |

\*Call the AMSOIL Technical Services Department at (715) 399-8324 with questions or for installation assistance.

## Dual Remote Oil Filtration Kit

(Without filter elements—2 required).

Versatile system combines full-flow and by-pass oil filtration on a single, easy-to-install mount.

All installation parts are included.



## Marine Dual Remote Oil Filtration Kit

High efficiency oil filtration system for marine applications combines full-flow and by-pass oil filters on an easily accessible remote mount. Adapter kits allow system to be used with a wide variety of marine engines.

### MARINE DUAL REMOTE OIL FILTRATION KIT

| Stock# | Pkg./Size                       | Wt. Lbs. | Cost   |
|--------|---------------------------------|----------|--------|
| BMK-18 | (1) Marine Mounting Kit         | 13.0     | 460.00 |
| BK-195 | (1) 3/4 - 16" thread adapter    | --       | 49.40  |
| BK-196 | (1) 13/16 - 16" thread adapter  | --       | 49.40  |
| BK-197 | (1) 18 mm - 1.5" thread adapter | --       | 49.40  |
| BK-198 | (1) 20 mm - 1.5" thread adapter | --       | 49.40  |

\* The BMK-18 kit includes a dual filter mount, mounting hardware, hoses, hose fittings and component parts. Filter elements and adapter kits sold separately.

Call the AMSOIL Technical Services Department at (715) 399-8324 or order a G-2051 Marine Dual Remote Cross Reference Guide (\$0.30) to determine the appropriate adapter kit for your application.



## Large Spider Filter Wrench

Adjustable filter wrench with three clamping legs driven by a gear mechanism for maximum range and gripping ability. For auto and light truck applications. Range: 2<sup>3</sup>/<sub>8</sub>" to 4<sup>3</sup>/<sub>4</sub>" (61 mm to 121 mm).

| Stock # | Wt. Lbs. | Cost  |
|---------|----------|-------|
| G-2197  | 1.3      | 12.80 |



## Small Spider Filter Wrench

Adjustable filter wrench with three clamping legs driven by a gear mechanism for maximum range and gripping ability. For auto and motorcycle applications in hard to reach locations. Range: 2<sup>3</sup>/<sub>8</sub>" to 3<sup>3</sup>/<sub>4</sub>" (61 mm to 95 mm).

| Stock # | Wt. Lbs. | Cost |
|---------|----------|------|
| G-2198  | 0.8      | 7.50 |



## Strap Filter Wrench

Wide band tightens while you turn. Offers the widest range than any other wrench. For all filters. Range: Up to 6" (152 mm).

| Stock # | Wt. Lbs. | Cost |
|---------|----------|------|
| G-2199  | 0.5      | 4.35 |



## Mechanics Lube Kit

Contains the most critical tools for complete lube service of most makes and models. Includes tools for foreign and domestic servicing. Each kit contains the following:

- 13 Cap-type wrenches
- 2 Hex cap socket wrenches
- 2 Swivel-type filter wrenches
- 1 Strap wrench
- 1 Small spider wrench
- 1 Adjustable plier-type wrench
- 6 Drain plug wrenches
- 2 Metric square plug wrenches
- 3 Metric hex drain plug wrenches
- 1 12 point x 16 mm drain plug wrench
- 1 Low profile T45 Torx oil filter tool

| Stock # | Wt. Lbs. | Cost   |
|---------|----------|--------|
| G-2200  | 15.0     | 167.00 |



## Filter Cap Wrench

Designed for Harley-Davidson and BMW motorcycle oil filter applications and can be used to install and remove the following AMSOIL Ea Motorcycle Oil Filters: EaOM122/122C, EaOM132/132C, EaOM133/133C, EaOM134/134C, EaOM135/135C and EaOM136C.

| Stock # | Wt. Lbs. | Cost |
|---------|----------|------|
| G-2309  | 0.5      | 2.15 |





## Engine Flush

Cleans the crankcase, cylinder walls, pistons and rings for maximum efficiency, protection and performance. Preps engines for installation of AMSOIL Synthetic Motor Oil. Flushing requires one bottle per vehicle (4 to 6 qt. oil capacity).

Use Engine Flush before changing your oil.

| Stock# | Pkg./Size           | Wt.Lbs. | Cost   |
|--------|---------------------|---------|--------|
| AEF-CN | (1) 16-oz. Bottle   | 1.1     | 5.45   |
| AEF-16 | (12) 16-oz. Bottles | 13.0    | 64.20  |
| AEF-05 | (1) 5-gal. Pail     | 45.0    | 117.75 |



## Power Foam

Improves starting and performance. Cleans dirty intake systems and spark plugs and frees sticky valves. Also removes gum, varnish and carbon deposits from engine exterior surfaces.

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| APF-SC | (1) 18-oz. Spray Can   | 1.5     | 5.15  |
| APF-12 | (12) 18-oz. Spray Cans | 18.0    | 60.60 |



## Heavy Duty Metal Protector

A heavy-duty spray lubricant fortified with special rust and corrosion inhibitors. It penetrates and adheres to metal surfaces, leaving a dry, long lasting wax-like protective coating. Dries completely and doesn't attract dust. Ideal for motorcycle, bicycle and ATV chains. Also works well as an undercoat, preventing rust and eliminating squeaks.

| Stock# | Pkg./Size              | Wt.Lbs. | Cost  |
|--------|------------------------|---------|-------|
| AMH-SC | (1) 16-oz. Spray Can   | 1.5     | 6.60  |
| AMH-16 | (12) 16-oz. Spray Cans | 18.0    | 78.00 |



## Metal Protector

Disperses water and protects metal surfaces from rust and corrosion. Penetrates existing rust build-up and loosens bolts. Also dries wet electrical systems. A must for any home or shop. Keep a can in your vehicle too.

| Stock# | Pkg./Size                | Wt.Lbs. | Cost  |
|--------|--------------------------|---------|-------|
| AMP-SC | (1) 8.75-oz. Spray Can   | .8      | 4.55  |
| AMP-12 | (12) 8.75-oz. Spray Cans | 10.0    | 53.40 |

## Silicone Spray

Perfect for lubricating nonmetallic surfaces that come into contact with metal, nylon, cardboard, fiberglass, wood or plastic surfaces. Works great as a suede protectant. Use anywhere a light-duty or silicone lubricant is required. Special nonstain formula. USDA H-1 rated.

| Stock# | Pkg./Size             | Wt.Lbs. | Cost  |
|--------|-----------------------|---------|-------|
| ALS-SC | (1) 10-oz. Spray Can  | 1.2     | 6.70  |
| ALS-06 | (6) 10-oz. Spray Cans | 7.0     | 39.60 |

**Hundreds  
of Household  
Uses.**



## BriteSide™ Rain Clear Windshield Protectant

Maximize visibility in all kinds of weather. Rain, snow and sleet are repelled off glass. Wind action of driving forces moisture off the windshield, giving a clear view of the road ahead.

| Stock # | Pkg./Size         | Wt. Lbs. | Cost  |
|---------|-------------------|----------|-------|
| ARS-BA  | (1) 4-oz. Bottle  | .3       | 4.90  |
| ARS-04  | (4) 4-oz. Bottles | 1.2      | 19.20 |



## BriteSide™ T6 Cleaning Concentrate

Super concentrated cleaning product tackles the toughest cleaning jobs, yet when diluted with water, is safe and effective on virtually every surface or material. Full strength, T6 removes spray paint, surface rust, grease, oil, glue and ink. Label directions for several dilutions create a multipurpose cleaner for every chore in the house or garage.

| Stock# | Pkg./Size           | Wt.Lbs. | Cost   |
|--------|---------------------|---------|--------|
| BT6HG  | 64-oz. Bottle       | 4.7     | 22.85  |
| BT606  | (6) 64-oz. Bottles  | 29.7    | 136.50 |
| BT6-05 | (1) 5-gal. Pail     | 40.2    | 125.00 |
| G-1782 | 24-oz. Spray Bottle | -       | 1.70   |
| G-1783 | 2-oz. Syringe       | -       | 0.90   |





## **BriteSide™ Miracle Wash Aerosol Spray**

A unique dry car wash and polish delivers outstanding performance and quick, easy and economical applications. No water required. Specially formulated surfactants lift dirt and other particles from the surface of your car and hold them in suspension. Miracle Wash then acts as a shield, protecting the surface from abrasion while you wipe the dirt clean. Repels dust and light dirt particles and protects against the sun's ultraviolet rays.

| Stock# | Pkg./Size             | Wt.Lbs. | Cost  |
|--------|-----------------------|---------|-------|
| AMW-SC | (1) 13-oz. Spray Can  | 1       | 8.50  |
| AMW-06 | (6) 13-oz. Spray Cans | 6       | 50.40 |

## **BriteSide™ Heavy Duty SCRUB Hand Cleaner**

Formulated for the toughest cleaning jobs, BriteSide™ Heavy Duty SCRUB Hand Cleaner dissolves and assimilates oils and greases on hands with little or no rubbing action. Available with or without pumice. May be used with or without water.

| Stock# | Pkg./Size                    | Wt.Lbs. | Cost   |
|--------|------------------------------|---------|--------|
| BSH-BF | (1) 16-oz. Bottle            | 1       | 7.55   |
| BSH-16 | (6) 16-oz. Bottles           | 6       | 44.70  |
| BSH-1G | (1) Gallon Bottle            | 9       | 27.35  |
| BSH-04 | (4) 1-Gallon Bottles         | 36      | 107.80 |
| BHP-TB | (1) 3-lb. Tub (with Pumice)  | 3       | 14.35  |
| BHP-06 | (6) 3-lb. Tubs (with Pumice) | 18      | 85.50  |
| G-1788 | (25) 10-ml Sample Packets    | -       | 12.50  |
| G-1806 | (1) Gallon Bottle Pump       | -       | 1.95   |
| G-1818 | (1) Wall Mount Bracket       | -       | 15.50  |

## **Mothers® Automotive Appearance Products**

AMSOIL offers premium Mothers automotive appearance products that include everything needed to clean, polish and care for vehicles.

The Mothers product line is divided into four distinct categories: Reflections®, FX, Power Products and California Gold/Mothers Original, with additional supplemental products available as well. For product and pricing information, see [www.amsoil.com/catalogUS](http://www.amsoil.com/catalogUS) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed).

**NEW!**



# TRICO Wiper Blades

## TRICO Exact Fit

Pre-assembled to precisely match the vehicle's arm type. Easily install in only seconds. All-metal blade construction provides superior strength and durability. Provide better-than-OEM performance and longevity and cover nearly 99 percent of all auto/light truck applications.

## TRICO NeoForm

TRICO's highest-performing blades. Deliver constant, even pressure across the entire length of the wiper for a smoother, more consistent wipe. Attractive European aerofoil design keeps the blade on the windshield, even in high wind or vehicle speeds. Fit most popular vehicles and come with a blade cleaner cloth packet.

## TRICO Oktane

Feature an all-metal blade frame with built-in aerodynamic spoiler. Pre-attached universal adapter fits sport compact and other vehicles in the auto/light truck and tuner markets. Low profile reduces wind lift at higher speeds (up to 115 mph). Provide quiet operation with less chatter. Sleek look complements the aesthetics of today's modern vehicles. Available in six colors, including carbon fiber, chrome, white, red, blue and yellow.

## TRICO Winter

Feature a protective rubber boot to prevent snow and ice from clogging the blade, providing a clean wipe and enhanced driving visibility. Riveted design for extra durability. Extra-thick, rugged OEM metal superstructure provides superior strength, and the pre-attached universal adapter fits 95 percent of vehicles.

## TRICO Classic

Designed for vintage cars. Feature silver finish to resemble OEM blades on many classic American cars manufactured during the 1940s, '50s and '60s. Precision cut rubber wiping element provides a clean wipe every time. AMSOIL offers five models from the Classic blade line.



### Exact Fit



### NEOFORM BEAM BLADE



### Winter



### Classic



Fill in your vehicle information. See [www.amsoil.com/catalogUS](http://www.amsoil.com/catalogUS) for pricing information. For application and pricing information, call 1-800-956-5695 (Monday - Friday, 8 a.m. - 5 p.m. Central Time) or contact the AMSOIL Dealer listed on the back of your catalog (if one is listed).

Make \_\_\_\_\_ Year \_\_\_\_\_ Full Model \_\_\_\_\_

Your Trico wipers are \_\_\_\_\_

### MECHANICS SHIRT

Constructed of a comfortable 65% polyester/35% cotton material that wicks moisture from the body. Two convenient buttoned pockets, long tuck-in tail and stain release finish. Sizes S-XXXL.

| Stock # | Size | Cost  |
|---------|------|-------|
| G-2251  | S    | 43.50 |
| G-2252  | M    | 43.50 |
| G-2253  | L    | 43.50 |
| G-2254  | XL   | 43.50 |
| G-2255  | XXL  | 45.75 |
| G-2256  | XXX  | 49.00 |



Back



### BLADE T-SHIRT

Stylish blue 100 percent preshrunk cotton t-shirt. Sizes S-XXXL.

| Stock # | Size | Cost  |
|---------|------|-------|
| G-2101  | S    | 14.45 |
| G-2102  | M    | 14.45 |
| G-2103  | L    | 14.45 |
| G-2104  | XL   | 14.45 |
| G-2105  | XXL  | 16.15 |
| G-2106  | XXX  | 16.15 |



Back



### BLACK FLAME CAP

Embroidered logos on the front and back. Spandex woven sweatband for the perfect fit. One size fits most.

| Stock # | Cost  |
|---------|-------|
| G-2233  | 14.40 |



### V-TWIN MOTORCYCLE T-SHIRT

A favorite among bikers. 100 percent cotton. Sizes S-XXXL.

| Stock # | Size | Cost  |
|---------|------|-------|
| G-2136  | S    | 14.20 |
| G-2137  | M    | 14.20 |
| G-2138  | L    | 14.20 |
| G-2139  | XL   | 14.20 |
| G-2140  | XXL  | 15.85 |
| G-2141  | XXX  | 15.85 |



**STAINLESS STEEL MUG**

Fourteen oz. AMSOIL Stainless Steel Mug is thermally insulated for hot or cold beverages. Features translucent blue acrylic outer shell, stainless steel inner shell and spill proof lid.

| Stock # | Cost |
|---------|------|
| G-1743  | 9.45 |



**PLAYING CARDS**

AMSOIL playing cards feature AMSOIL logo and "The First in Synthetics." Package includes two decks in a plastic container.

| Stock # | Cost |
|---------|------|
| G-2144  | 8.85 |



**EXECUTIVE PEN**

This upscale triangular Euro style pen features metallic barrel, large comfortable rubber grip and unique clip design.

| Stock # | Cost |
|---------|------|
| G-1837  | 3.90 |



**HITCH COVER**

High quality AMSOIL Hitch Cover features full color AMSOIL logo permanently sealed under a urethane dome.

| Stock # | Cost |
|---------|------|
| G-1948  | 7.25 |



**AMSOIL RACING DECALS**

| Stock# | Size              | Cost  |
|--------|-------------------|-------|
| G-1789 | (4" - pkg. of 10) | 4.40  |
| G-1800 | (7" - pkg. of 10) | 6.65  |
| G-1790 | (12" - pkg. of 5) | 5.00  |
| G-1791 | (1 - 20")         | 2.60  |
| G-1792 | (1 - 36")         | 4.35  |
| G-1793 | (1 - 48")         | 12.20 |



**DECALS**

| Stock # | Cost                   |
|---------|------------------------|
| G-1051  | (3" - pkg. of 20) 2.25 |
| G-1058  | (6" - pkg. of 10) 2.00 |
| G-1110  | (13") .85 ea           |
| G-1119  | (20 1/2") 2.35 ea      |
| G-1123  | (36") 4.00 ea          |
| G-1323  | (48") 9.50 ea          |

Become an AMSOIL Preferred Customer and have access to the complete line of AMSOIL clothing and promotional items at wholesale prices. Call 1-800-956-5695 (Monday - Friday, 8 a.m. - 5 p.m. CST) for more information.

# An American Success Story

## Insight Into the Life of AMSOIL Founder



AMSOIL presents "Albert J. Amatuzio: An American Success Story," a documentary detailing the events that shaped the man who created the world's first API qualified synthetic motor oil and set the lubricant industry on its heels. This 86-minute DVD gives viewers a glimpse into the man whose focus and determination created the synthetic motor oil industry,

the depth of his commitment to quality and the benefits and science behind the technology of synthetic lubrication.

The documentary begins by examining Amatuzio's early years growing up in Duluth, Minn. The story of those early years, as told by his family and friends, brings understanding of the personality that has faced every challenge and refused to accept defeat.

Amatuzio's distinguished military career further demonstrates his determination to succeed. Interviews with his friends, family and fellow pilots detail the competitive spirit that challenged each of them to do and be their very best.

The documentary examines step by step how Amatuzio brought his revolutionary idea to reality, with his friends, family and business associates relating stories of his successes and setbacks along the way to successfully formulating the world's first API qualified synthetic motor oil and building a successful business from the ground up.

### ALBERT J. AMATUZIO: AN AMERICAN SUCCESS STORY DVD

|         |       |
|---------|-------|
| Stock # | Cost  |
| G-2218  | 11.10 |



### A STUDY OF MOTORCYCLE OILS

Compares the test results of 26 different motorcycle oils in the most critical areas of motorcycle oil performance, including wear protection, shear stability and rust protection, helping consumers make educated decisions regarding which oil to use in their motorcycles.

**Stock # Cost**  
G-2156 1.15



### POWER SPORTS APPLICATION GUIDE

Lubricant, oil filter and air filter recommendations for motorcycles, ATV's, personal watercraft and outboard motors.

**Stock # Cost**  
G-2135 2.25



### PRODUCT RECOMMENDATION AND DRAIN INTERVAL CHART

Provides product and drain interval recommendations for AMSOIL motor oils and drivetrain lubricants, as well as filter change recommendations.

**Stock # Cost**  
G-2281 0.35



### COMPARATIVE MOTOR OIL TESTING BROCHURE

Examines the impressive results of industry testing on AMSOIL Synthetic 10W-30 Motor Oil and 10 competing conventional and synthetic motor oils.

**Stock # Cost**  
G-1971 0.90



### COMMITMENT TO EXCELLENCE BROCHURE

Highlights the AMSOIL Corporation, its products, history, manufacturing, commitment and exciting future.

**Stock # Cost**  
G-393 0.90



### PRODUCT SELECTION GUIDE

Lubricant recommendations for domestic and foreign vehicles and components of all kinds.

**Stock # Wt. Cost**  
G-50 0.6 lbs. 8.90



### APPLICATIONS BROCHURE

Highlights the thousands of AMSOIL applications.

**Stock # Cost**  
G-487 0.60



### FILTER APPLICATIONS AND CROSS REFERENCE GUIDE

Oil, air, fuel, racing, transmission, coolant and hydraulic filter recommendations for cars, trucks and heavy-duty applications.

**Stock # Wt. Cost**  
G-3000 2.4 lbs. 8.35



# The Company of Firsts

## Over 30 Years of Innovation and Leadership



AMSOIL INC.  
2206 WINTER STREET  
SUPERIOR, WI 54880

WE HONOR



- **First** to develop an API rated 100 percent synthetic motor oil.
- **First** to introduce the concept of “extended drain intervals” with a recommended 25,000-mile/12-month drain interval.
- **First** U.S. company to utilize the NOACK volatility test as a standard of performance excellence.
- **First** to produce synthetic motor oils for diesel engines, racing engines, turbos and marine engines.
- **First** to introduce synthetic oils that legitimately contribute to improving fuel efficiency.
- **First** to manufacture synthetic gear lube for automotive use.
- **First** to manufacture a 100:1 pre-mix synthetic 2-cycle oil.
- **First** to manufacture a synthetic automatic transmission fluid for automotive use.

*Refer to this referral number to save time  
and make ordering easier. Call toll-free at  
1-800-956-5695. Credit card orders only.* 

Referral # \_\_\_\_\_